

sre

BREEAM Pre-Assessment

BREEAM UK New Construction V7

Scitech Ekium

Discovery Park
Sandwich
CT13 9FF

Dover District Council

Version	Revision	Date	Author	Reviewer	Project Manager
1	A	12.05.2026	Samantha May	Emily Glyde	Samantha May

© Copyright SRE Ltd 2026

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the author, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law. For permission requests, write to the author, at the address below:

SRE Main Office
3 London Square | Cross Lanes
Guildford | Surrey | GU1 1UJ
T: +44 (0)1730 710044
E: info@sre.co.uk
W: www.sre.co.uk

Contents

Executive Summary	5
1.0 Assessment Overview	7
1.1. Development Overview	7
1.2. Assessment Criteria	7
1.3. BREEAM Score	7
1.4. BREEAM Minimum Standards	8
1.5. Site Assumptions	9
2.0 Credit Summary	12
2.1. Summary score sheet	12
3.0 Detailed Pre-Assessment	18

The background of the slide is a microscopic image of plant tissue, showing a network of cells with thick, brownish cell walls. On the left side, there is a column of elongated, rectangular cells. The rest of the image is filled with a dense, irregular pattern of smaller, more rounded cells, creating a honeycomb-like texture.

Executive Summary

Executive Summary

SRE exists to ensure that the built environment enhances life without costing the earth. This BREEAM¹ Pre-Assessment has been developed by SRE on behalf of Scitech Ekium (The Client) to demonstrate the likely BREEAM score of Discovery Park, Haig Drive, Sandwich (the Proposed Development).

This Pre-assessment has been based on details supplied by the Client and wider design team to date, in addition to further desk-based study, best practice and historical data. SRE has been a licensed BREEAM organisation for over 10 years and has extensive knowledge of the methodology, which is used to produce an accurate assessment score.

Project Name	Discovery Park
Lead Assessor	Samantha May
Target Rating	'Very Good' (≥ 55%)
BREEAM Version	BREEAM UK New Construction Version 7
Assessment Type	Industrial Unit – Light manufacturing
BREEAM Type	Fully Fitted


Scenario	Min Standards met?	Score	BREEAM Rating
Targeted credits	Yes	62.93%	'Very Good'

The potential credits have not been thoroughly investigated at this stage of the BREEAM Assessment. They are to remain potential until the original sought out credits are deemed unachievable by the Project Team and Assessor, and are used to secure the score in case the targeted rating is at risk.



Figure 1 - BREEAM Score Chart for the Proposed Development.

¹Copyright exists on the BREEAM and BRE Global name and logo and these are registered trademarks of BRE Global Ltd (BREG) and it may not be used or reproduced in any form for any purpose without prior written consent of BRE.

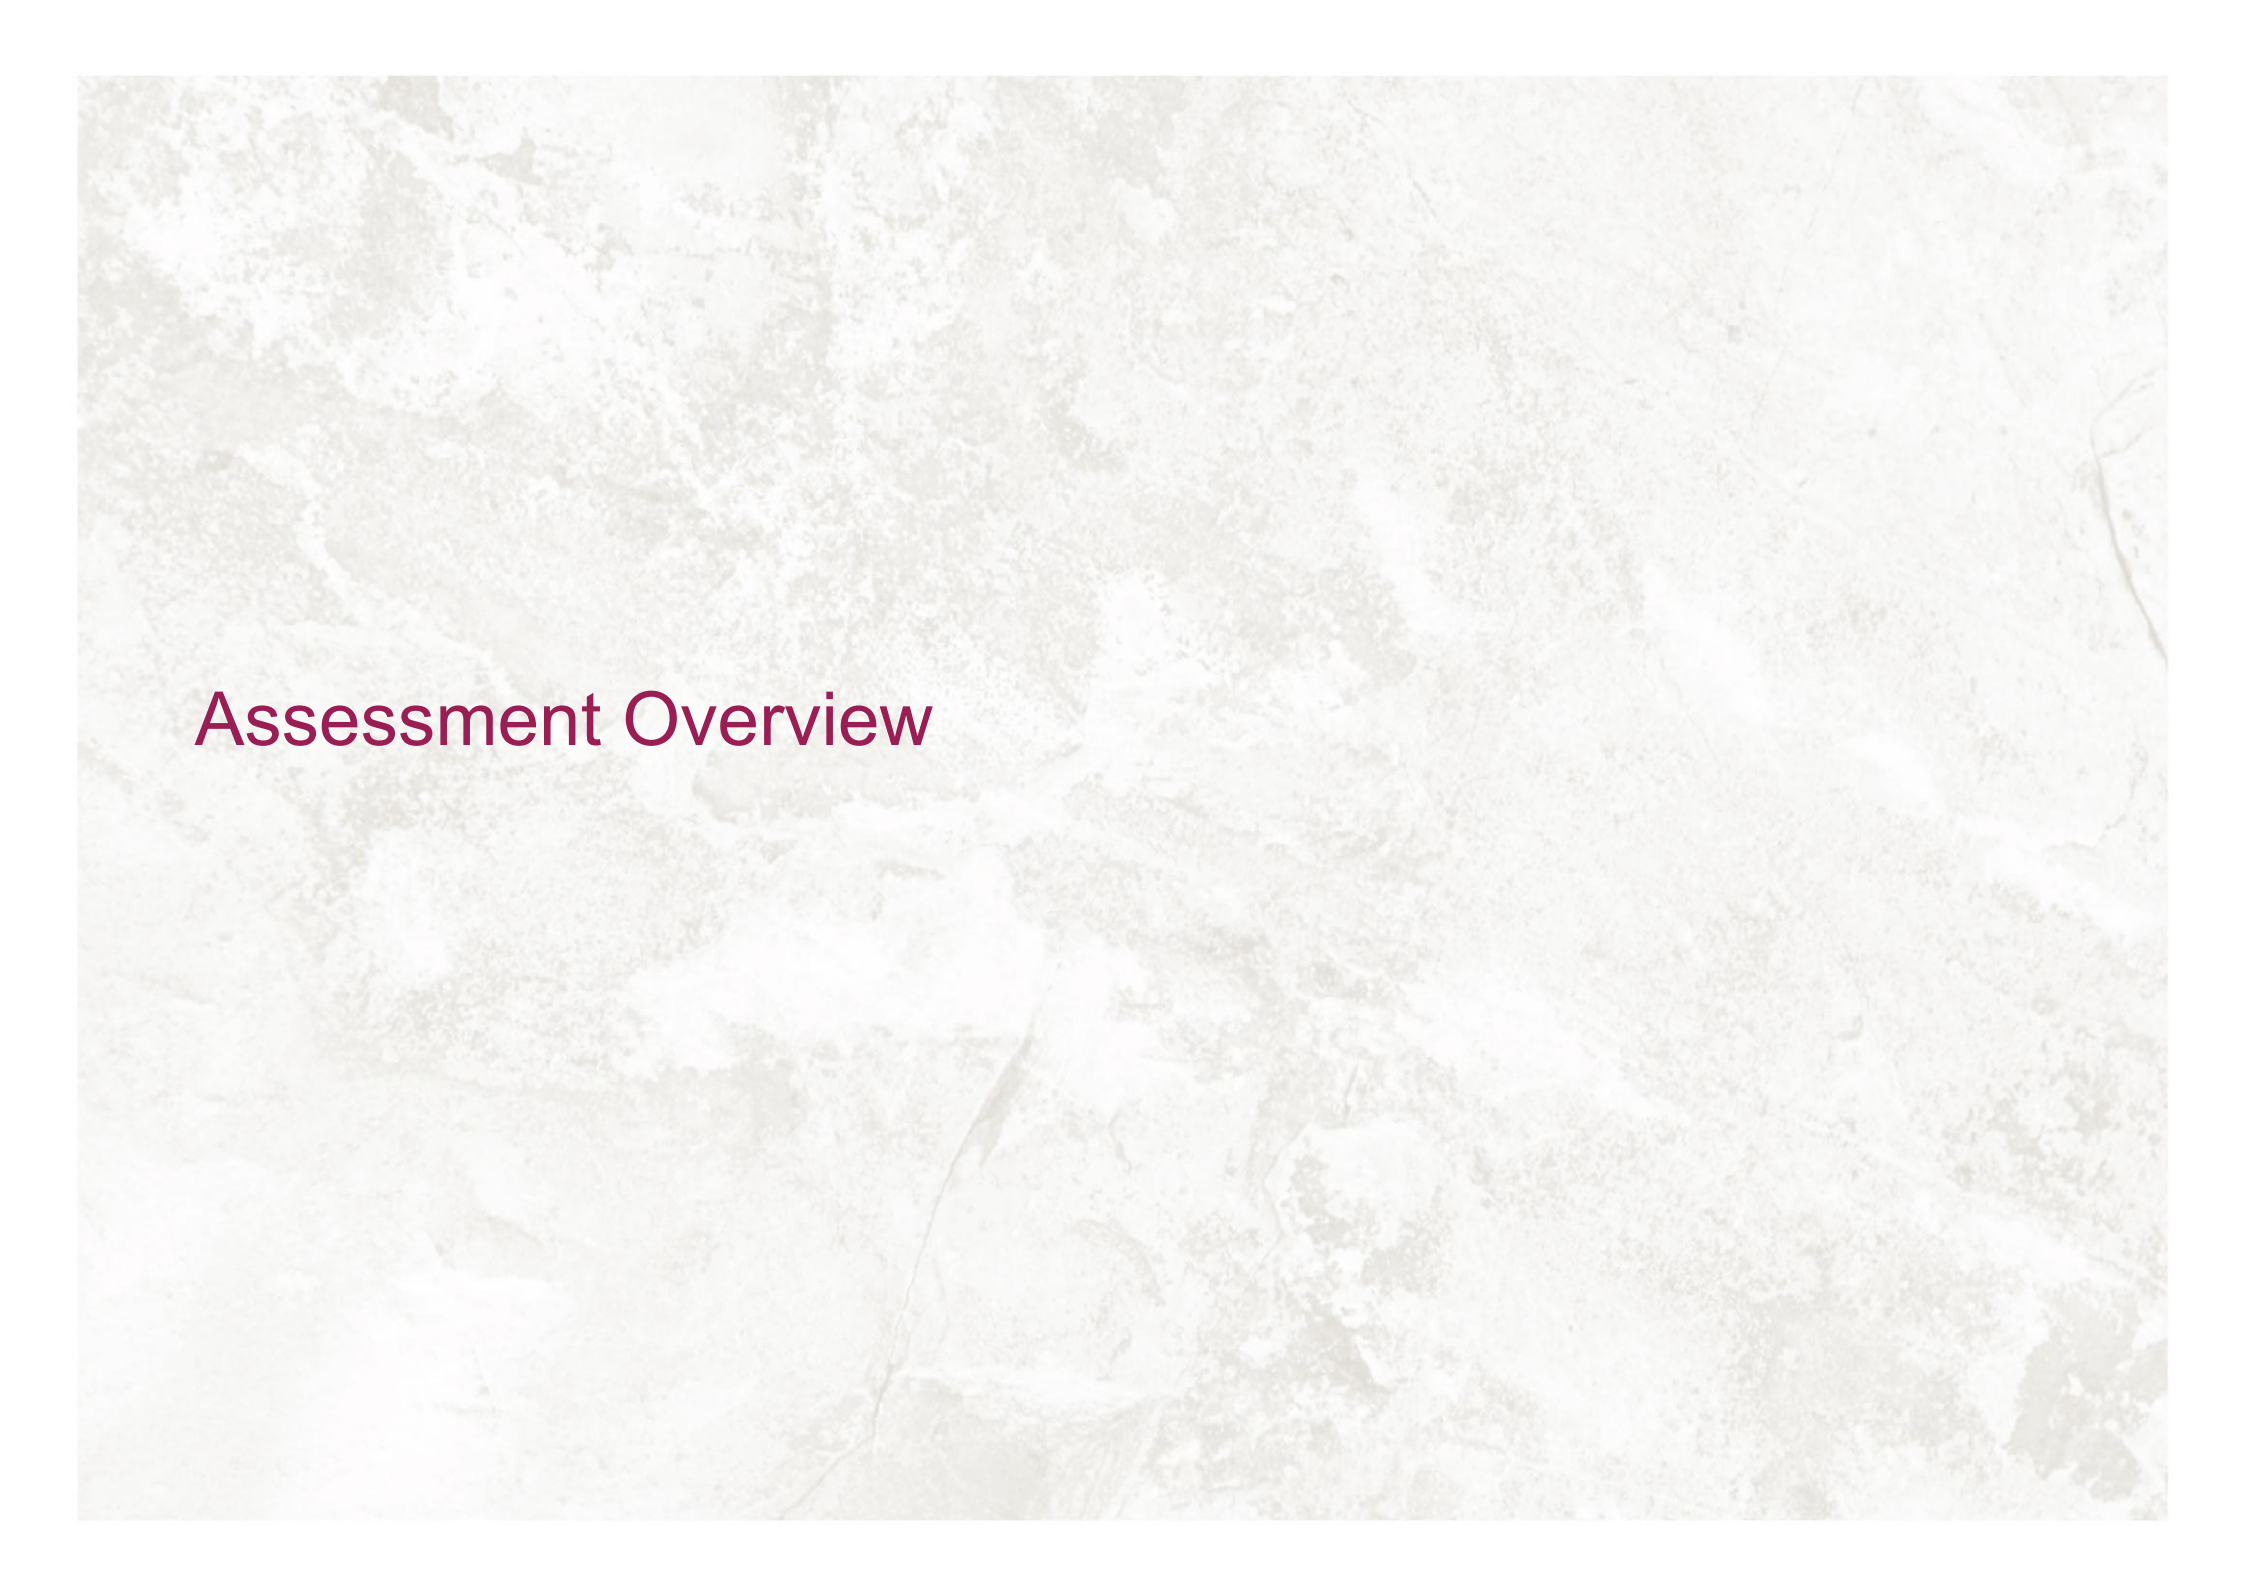The background of the slide is a light beige or cream-colored paper with a marbled texture. The marbling consists of irregular, swirling patterns of slightly darker beige and light tan colors, giving it a classic, aged appearance.

Assessment Overview

1.0 Assessment Overview

1.1. Development Overview

The Proposed Development – Haig Drive, Discovery Park, Sandwich, CT13 9FF – consists of the new construction of a four-storey extension to accommodate increased capacity for manufacturing capacity and to integrate more modern equipment to create an efficient manufacturing capability. The resulting development will comprise of preparation rooms, plant and machinery rooms and associated works. The Site is situated within an established industrial area and the eastern boundary is defined by a through road with derelict hard landscaping directly to the south of the site.

The Proposed Development will cover a GIA of approximately 2,400m². The ground floor plan for the proposed development is shown in Figure 2.

1.2. Assessment Criteria

The BREEAM Pre-Assessment has shown that the Proposed Development can currently achieve an 'Very Good' rating under BREEAM UK New Construction Version 7 (SRE Targeted) based on the assumptions and information agreed to-date.

The BREEAM Assessment will be assessed as an 'Industrial Unit – process/ manufacturing, Fully-Fitted' assessment to reflect the scope of the works. The credits included within the assessment are therefore those relevant to the scope of a 'Fully Fitted' assessment.

1.3. BREEAM Score

The target score for the scheme is currently **62.93%**, which will deliver a **'Very Good'** rating. The credits targeted are considered by SRE and the design team to be realistic and deliverable on-site. The potential credits will be investigated at a later stage if the targeted credits are deemed unachievable.

BREEAM standards can be challenging to achieve, and the Pre-Assessment report should be carefully reviewed by the design and construction teams to ensure all targeted credits are delivered. Sections 2.0 and 3.0 list the specific credits proposed as part of the BREEAM 'Very Good' rating.

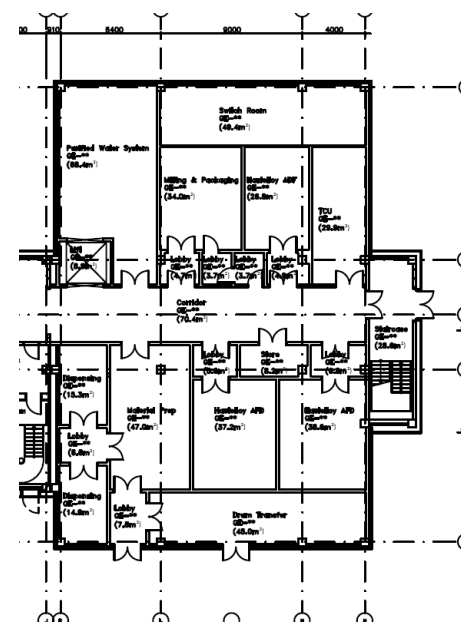


Figure 2 – Floor plan for the Proposed Development.

1.4. BREEAM Minimum Standards

In addition to the minimum score required, compliance with specific credits (known as minimum standards for each targeted rating) is summarised below. If the required minimum standards are not met, the targeted rating will not be achieved regardless of the overall score attained by the project.

Issue	Targeted
Man 04 - Commissioning and handover	✓
Hea 04 - Indoor air quality	✓
Ene 03 - Energy monitoring	✓
Wat 01 - Water consumption	✓
Wat 02 - Water monitoring	✓
Mat 03 - Responsible sourcing of construction products	✓

Table 1 – BREEAM UK New Construction Version 7 Minimum Standards for a 'Very Good' rating


1.5. Site Assumptions

Site and project assumptions made at the current stage are shown in Table 2. These assumptions are to be confirmed by the client and the design team so the BREEAM Design Assessment and achieved score will be updated accordingly.

Assessment Information	Selection
Building Type	Industrial
Building Type sub-group	Process/manufacturing
Does this industrial building have an office area?	No
Assessment stage	Design (Interim)
Project scope	Fully Fitted
Building Net internal floor area m ²	2,400 m ²
Building Gross internal floor area m ²	2,400 m ²
Is the building designed to be untreated?	No
Building services - heating system type	Air system – AHU with steam heating
Building services - cooling system type	Chillers
Safe access: Are there relevant areas relating to this credit?	Yes
Outside space: Are there external areas relating to this credit?	No
Are there any water demands present other than those assessed in Wat 01?	No
Are there statutory requirements, or other issues outside of the control of the project, that impact the ability to provide outdoor space?	No
Is demolition occurring under the developer's ownership for the purpose of enabling the assessed development?	No
Are WC facilities only provided within the residential areas of a long-term residential accommodation?	N/A
Is this a speculative development?	No
Is the project required to connect to a District Heating system, and it supplies all heating and hot water demands to the building?	No
Assessment route for Le 03	Comprehensive route
Does the assessment area have exterior lighting?	Yes
Number of flexible demand response points available (Ene 07)	1-3
Do you want to filter out Ene 08 as per issue specific notes 3.0 and 3.1?	No

Assessment Information	Selection
In-scope unregulated energy use by equipment/regulated energy use (%) (Ene 05)	No in-scope equipment
In-scope unregulated energy using systems / regulated energy use (Ene 06)	No in-scope equipment
In-scope non-sanitary water consumption / sanitary water consumption (%) (Wat 04)	No in-scope equipment

Table 2- Site & Project assumption for BREEAM Assessment

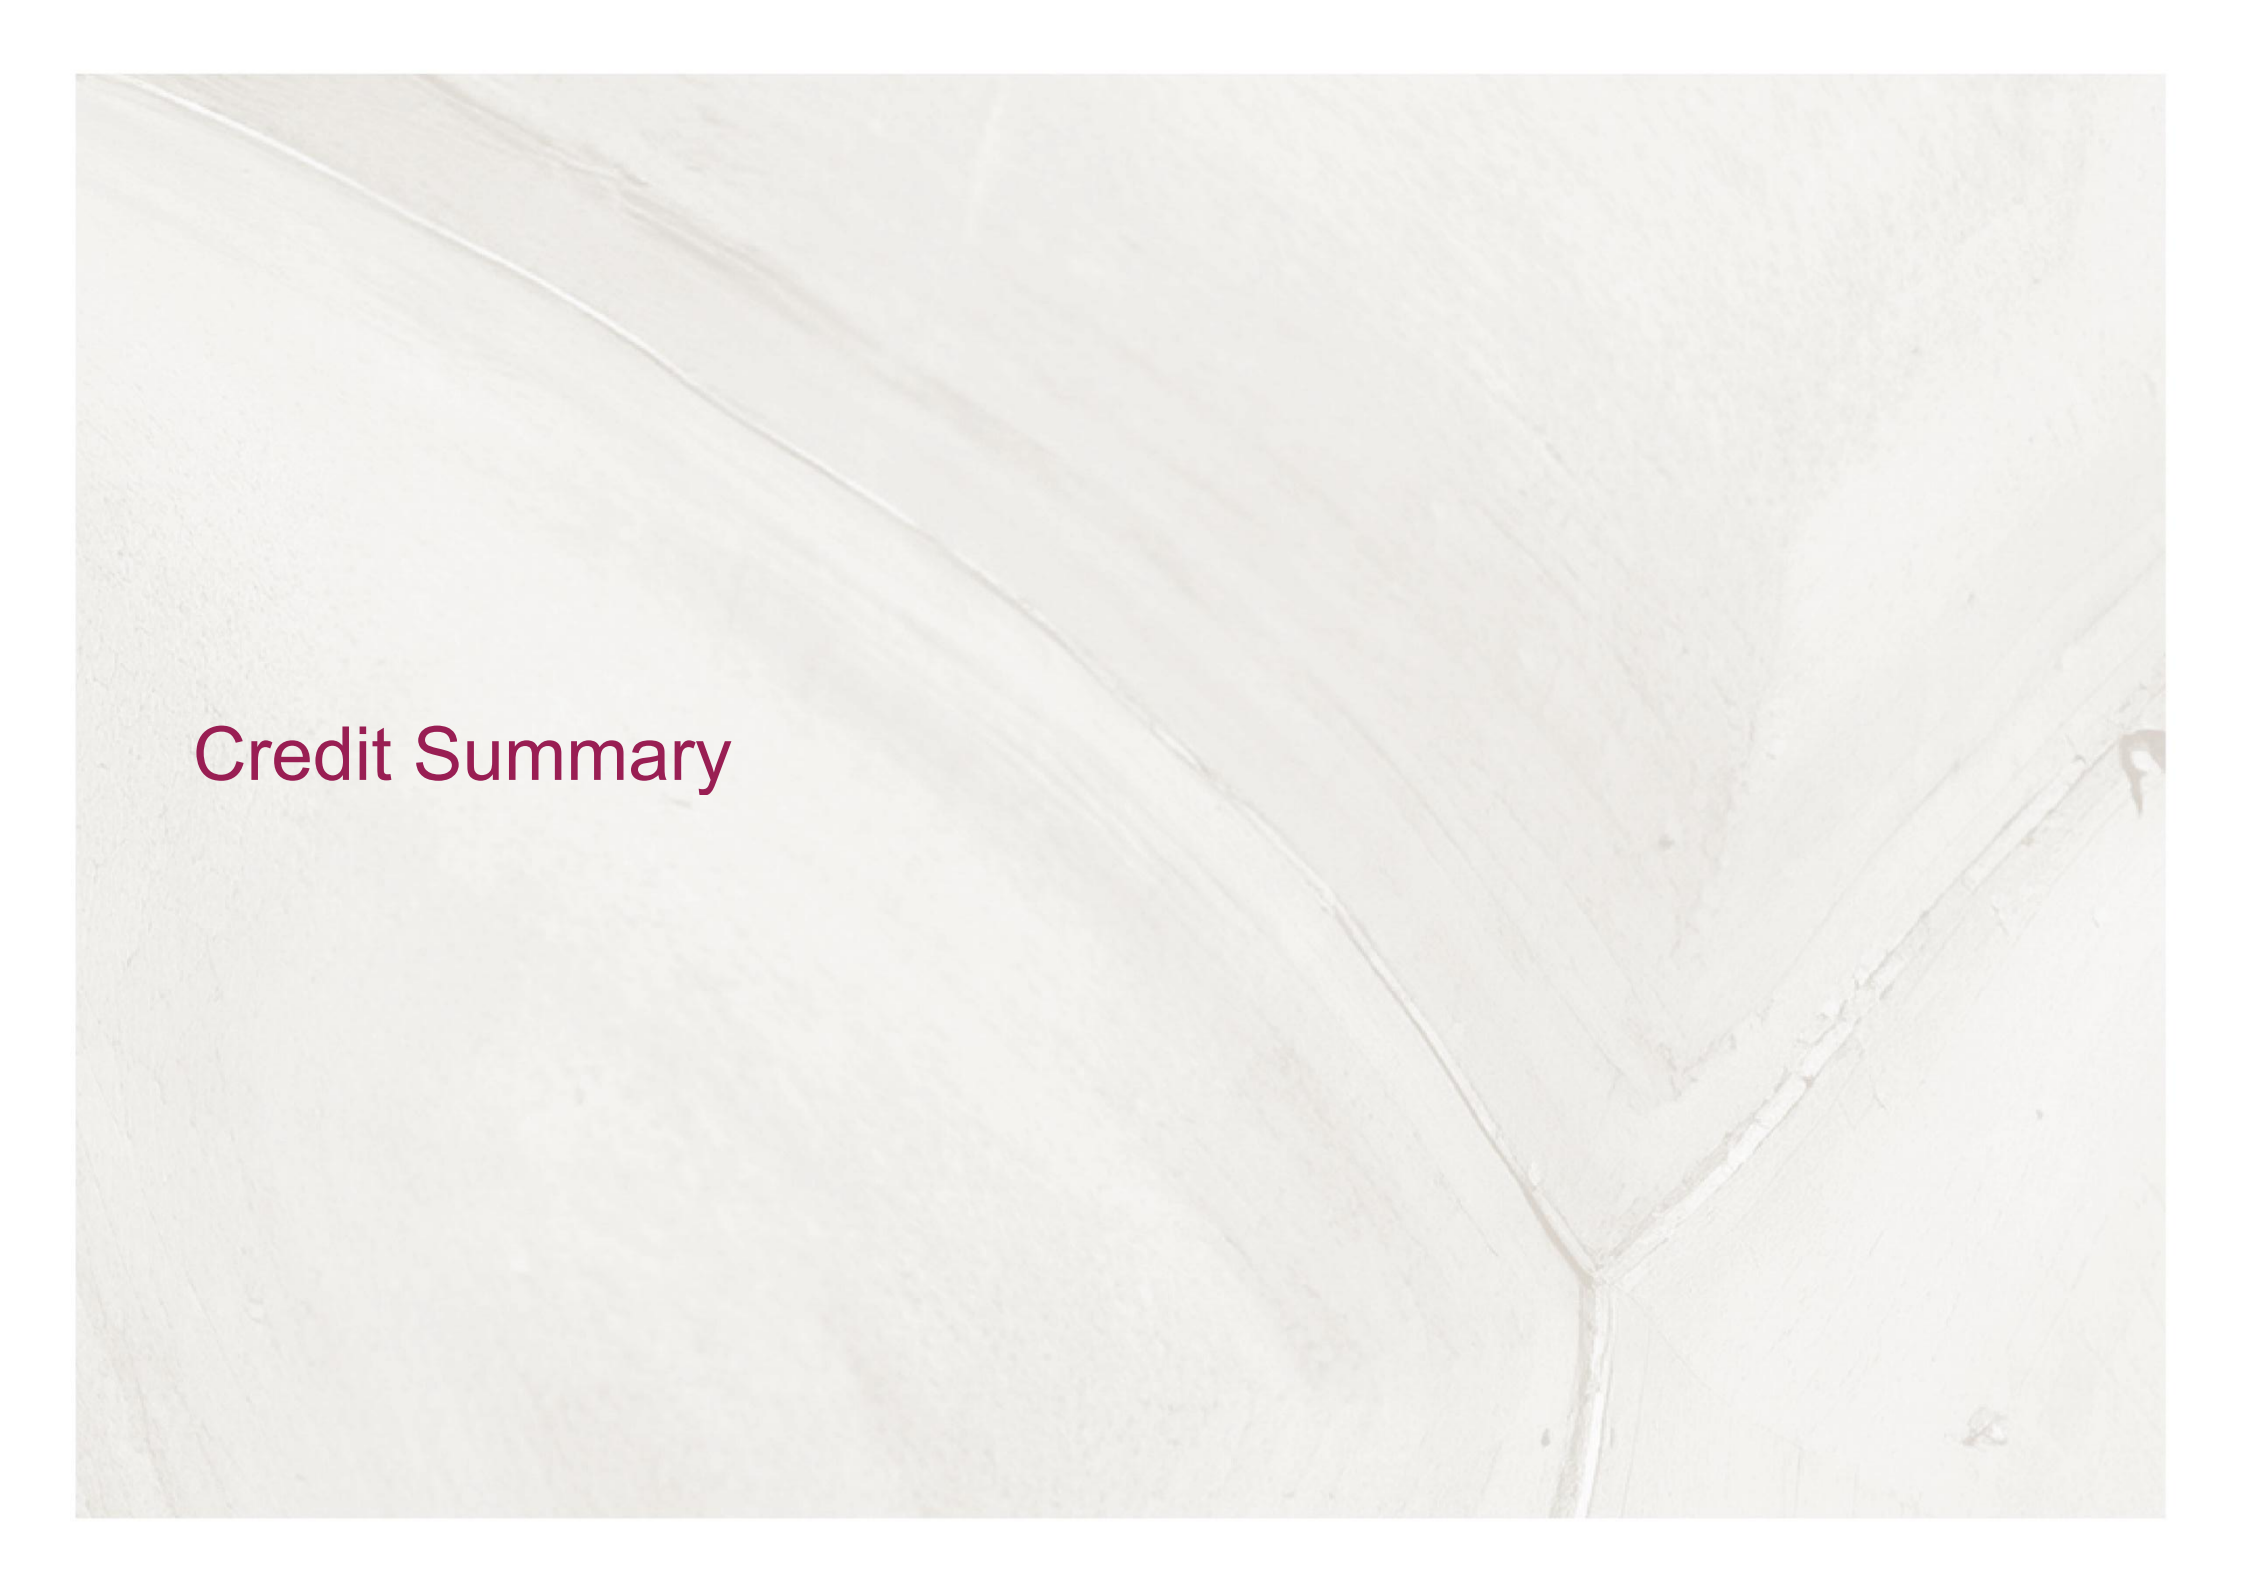

Credit Summary

2.0 Credit Summary

2.1. Summary score sheet


BREEAM Category		Available	Targeted	Potential
Management (0.52 % per Credit)				
Man 01	Project brief and design	4	2	2
Man 02	Life cycle cost and service life planning	4	1	3
Man 03	Responsible construction	6	5	1
Man 03 - Exemplary(1)	Responsible construction	1	0	0
Man 04	Commissioning and handover	4	4	0
Man 05	Aftercare	3	3	0
Man 05 - Exemplary(1)	Aftercare	1	0	0
Standard Management Credit Total:		21	15	6
Exemplary Management Credit Total:		2	0	0
% Management Total (Standard + Exemplary):		12.92	7.80	3.12
Health & Wellbeing (1.25 % per Credit)				
Hea 01	Natural light	3	3	0
Hea 01 - Exemplary(1)	Natural light	1	0	0
Hea 01 - Exemplary(2)	Natural light	1	0	0
Hea 02	Artificial light	2	1	1
Hea 02 - Exemplary(1)	Artificial light	1	0	0
Hea 03	Non-visual effects of light	1	1	0
Hea 04	Indoor air quality	1	1	0
Hea 04 - Exemplary(1)	Indoor air quality	2	2	0
Hea 06	Acoustic performance	3	3	0
Hea 07	Safe and accessible design	1	0	1

BREEAM Category		Available	Targeted	Potential
Hea 08	Security	1	0	1
Hea 08 - Exemplary(1)	Security	1	0	0
Standard Health & Wellbeing Credit Total:		12	9	3
Exemplary Health & Wellbeing Credit Total:		6	2	0
% Health & Wellbeing Total (Standard + Exemplary):		21.00	13.25	3.75
Energy (0.53 % per Credit)				
Ene 01	Energy and carbon performance for regulated energy uses	9	5	2
Ene 01 - Exemplary(1)	Energy and carbon performance for regulated energy uses	3	0	0
Ene 02	Prediction of operational energy and carbon	12	0	12
Ene 02 - Exemplary(1)	Prediction of operational energy and carbon	1	0	0
Ene 02 - Exemplary(2)	Prediction of operational energy and carbon	1	0	0
Ene 02 - Exemplary(3)	Prediction of operational energy and carbon	1	0	0
Ene 02 - Exemplary(4)	Prediction of operational energy and carbon	1	0	0
Ene 03	Energy monitoring	2	1	1
Ene 04	Low carbon design	5	0	2
Ene 06	Energy efficient systems	0	0	0
Ene 07	Flexible demand response	1	0	0
Ene 08	Installed controls	2	1	0
Standard Energy Credit Total:		31	7	17
Exemplary Energy Credit Total:		7	0	0
% Energy Total (Standard + Exemplary):		23.43	3.7	9.01
Transport (0.71 % per Credit)				
Tra 01	Transport assessment and travel plan	2	2	0
Tra 02	Sustainable transport measures	10	0	2
Standard Transport Credit Total:		12	2	2
Exemplary Transport Credit Total:		0	0	0

BREEAM Category		Available	Targeted	Potential
% Transport Total (Standard + Exemplary):		8.52	1.42	1.42
Water (0.83% per Credit)				
Wat 01	Water consumption	5	3	0
Wat 01 - Exemplary(1)	Water consumption	1	0	0
Wat 02	Water monitoring	1	1	0
Wat 03	Water leak detection and prevention	2	2	0
Wat 04	Water efficient equipment and systems	0	0	0
Wat 05	Prediction of operational water consumption	1	0	1
Wat 05 - Exemplary(1)	Prediction of operational water consumption	1	0	0
Standard Water Credit Total:		9	6	1
Exemplary Water Credit Total:		2	0	0
% Water Total (Standard + Exemplary):		9.47	4.98	0.83
Materials (1.14 % per Credit)				
Mat 01	Building life cycle assessment	7	5	2
Mat 01 - Exemplary(1)	Building life cycle assessment	1	0	0
Mat 01 - Exemplary(2)	Building life cycle assessment	1	0	0
Mat 01 - Exemplary(3)	Building life cycle assessment	1	0	0
Mat 02	Environmental product declarations	1	1	0
Mat 03	Responsible sourcing of construction products	4	2	0
Mat 03 - Exemplary(1)	Responsible sourcing of construction products	1	0	0
Mat 04	Durability and resilience	1	1	0
Mat 05	Material efficiency	1	1	0
Standard Materials Credit Total:		14	10	2
Exemplary Materials Credit Total:		4	0	0
% Materials Total (Standard + Exemplary):		19.96	11.40	2.28
Waste (0.78 % per Credit)				

BREEAM Category		Available	Targeted	Potential
Wst 01	Construction waste management	4	4	0
Wst 01 - Exemplary(1)	Construction waste management	1	0	0
Wst 02	Use of recycled and sustainably sourced aggregates	1	0	0
Wst 02 - Exemplary(1)	Use of recycled and sustainably sourced aggregates	1	0	0
Wst 03	Operational waste	1	1	0
Wst 05	Adapting to climate change	1	1	0
Wst 05 - Exemplary(1)	Adapting to climate change	1	0	0
Wst 06	Disassembly and adaptability	2	2	0
Standard Waste Credit Total:		9	8	0
Exemplary Waste Credit Total:		3	0	0
% Waste Total (Standard + Exemplary):		10.02	6.24	0
Land Use & Ecology (0.81 % per Credit)				
Lue 01	Site selection	2	0	0
Lue 02	Ecological risks and opportunities	2	2	0
Lue 02 - Exemplary(1)	Ecological risks and opportunities	1	0	0
Lue 03	Managing impacts on ecology	3	3	0
Lue 04	Ecological change and enhancement	4	2	0
Lue 04 - Exemplary(1)	Ecological change and enhancement	1	0	0
Lue 05	Long term ecological management	2	2	0
Standard Land Use & Ecology Credit Total:		13	9	0
Exemplary Land Use & Ecology Credit Total:		2	0	0
% Land Use & Ecology Total (Standard + Exemplary):		12.53	7.29	0
Pollution (0.62 % per Credit)				
Pol 01	Impact of refrigerants	3	2	0
Pol 02	Local air quality	3	3	0
Pol 03	Flood and surface water management	5	4	0

BREEAM Category		Available	Targeted	Potential
Pol 04	Reduction of nighttime light pollution	1	1	0
Pol 05	Reduction of noise pollution	1	1	0
Standard Pollution Credit Total:		13	11	0
Exemplary Pollution Credit Total:		0	0	0
% Pollution Total (Standard + Exemplary):		8.06	6.82	0
Innovation (1 % per Credit)				
Inn 01	Innovation			
AI - Innovation Credit Total:		1	0	0
% Innovation Total (Standard + Exemplary):		1	0	0
OVERALL TOTALS			79	31
% OVERALL SCORE TOTALS			62.93	20.47

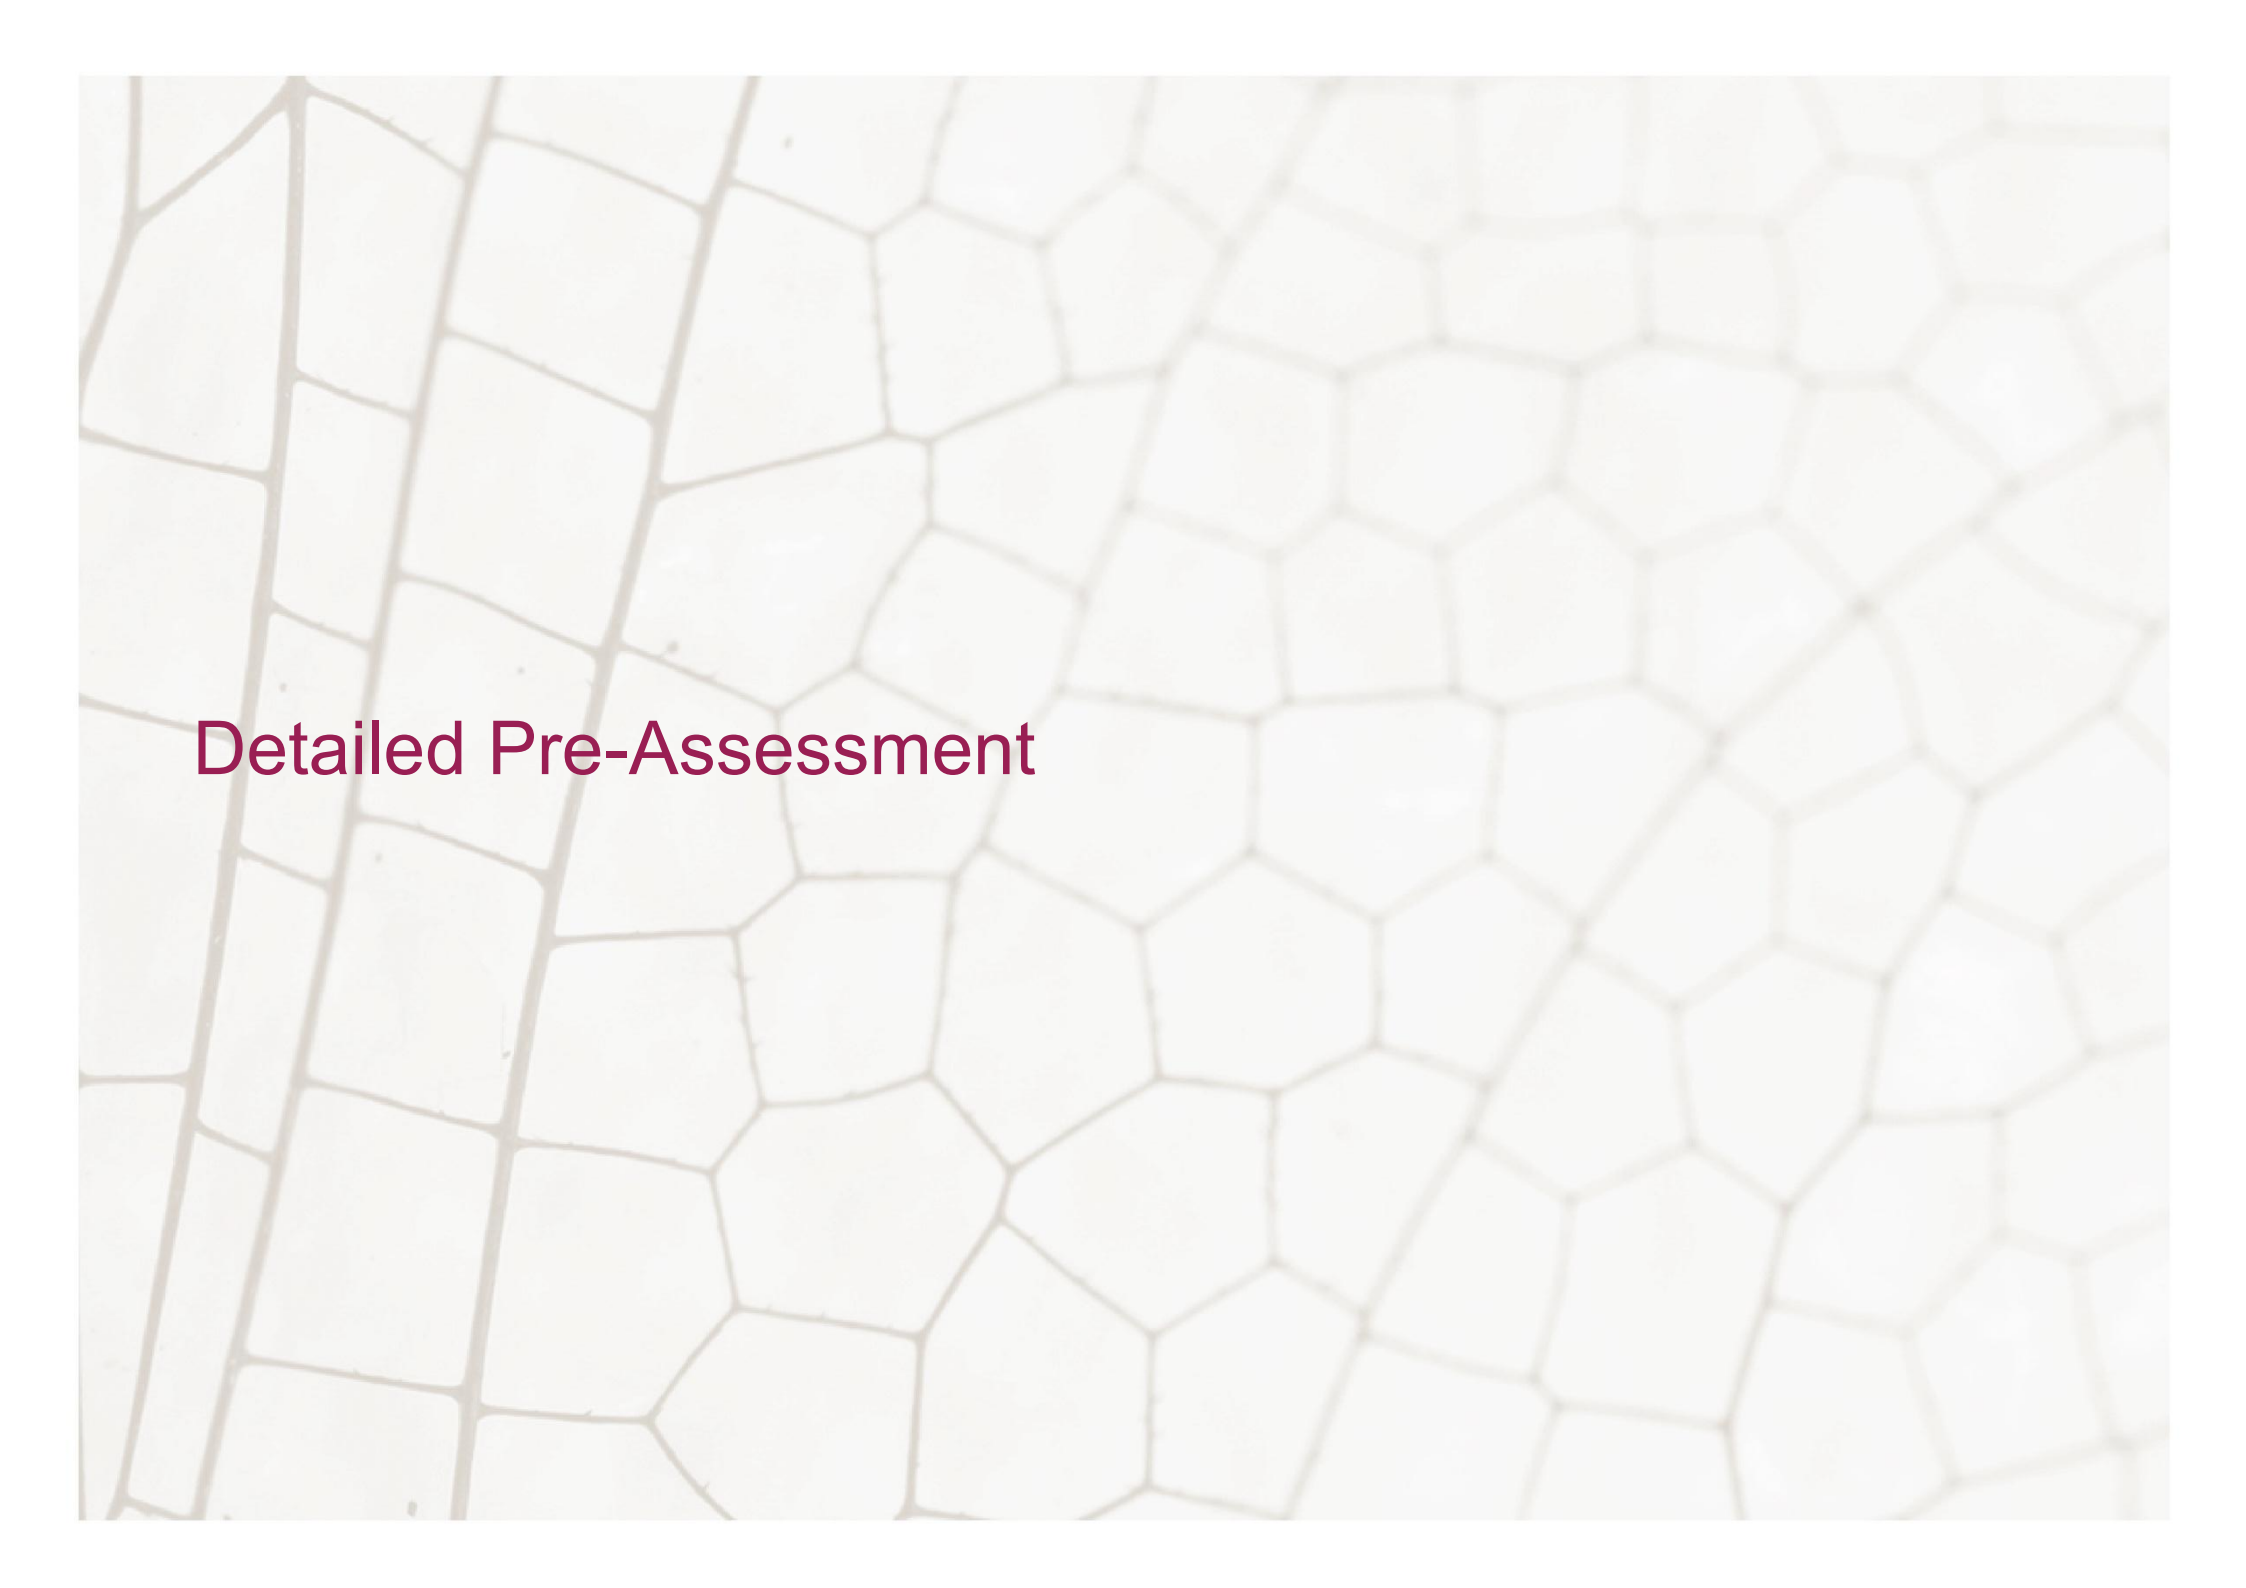

Detailed Pre-Assessment

3.0 Detailed Pre-Assessment

Credit		Available	Targeted	Potential	Comments
Management (0.52 % per Credit)					
Man 01 - Project brief and design					
1	Project planning	1	1	0	Project Delivery Planning (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted - Yes A clear brief is developed prior to completion of the concept design, to include input from all design team members and this information is shared with all relevant parties. This clear briefing document sets out the particular ambitions for the project: • Client requirements, e.g. internal environmental conditions required. • Sustainability objectives and targets, including BREEAM performance targets and any wider business or project sustainability objectives. • Timescales and budget. • List of consultees and professional appointments that may be required, e.g. suitably qualified acoustician (SQA) etc. • Constraints for the project, e.g. technical, legal, physical, environmental. Prior to completion of the concept design, the project team (Client, Design Team and Principal Contractor) meet specifically to discuss, identify and define the roles, responsibilities and contributions for each key phase of the project. When defining responsibilities, the following must be considered: • Building user requirements. • Aims of the design and design strategy. • Particular installation and construction requirements and limitations. • Design and construction risk assessments, e.g. national health and safety regulations or best practice, legionella risk assessment. • Legislative requirements, e.g. local building regulations, heritage requirements. • Sustainability objectives for the project. • Ecological protection measures (where required). • Procurement and supply chain "responsible and ethical sourcing." • Identifying and measuring project success in line with project brief objectives.

Credit	Available	Targeted	Potential	Comments
				- Building manager's or occupiers' budget and technical expertise in maintaining any proposed systems. - Maintainability and adaptability of the proposals. - Requirements for the production of project and end user documentation. - Requirements for commissioning, training and aftercare support. The project team demonstrate how the project delivery stakeholders' contributions and their input in the design process have influenced the following: - Initial Project Brief. - Project Execution Plan. - Communication Strategy. - Concept Design. - Final Design. <u>Comments & Actions</u> <i>Design Team to provide a completed copy of the SRE Man 01 meeting plan, the project execution plan, and the communication strategy.</i>
2	Stakeholder consultation	1	1	Stakeholder Consultation (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – Yes Prior to completion of the Concept Design, the design team consult with all interested parties on matters that covers the minimum consultation content. The project must demonstrate concisely how the interested party contributions and outcomes of the consultation exercise have influenced or changed the initial project brief and concept design; and these changes were implemented within the final design at post-construction. Prior to completion of the detailed design (Technical Design or equivalent), consultation feedback has been given to, and received by, all relevant parties. <u>Comments & Actions</u>

Credit	Available	Targeted	Potential	Comments
				Design Team to provide evidence of meetings between third-party stakeholders and how the outcomes of the meetings have influenced the Project Brief and early design options.
3	BREEAM AP – Concept Design	1	0	BREEAM AP – Concept Design (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – No (Potential) A BREEAM AP has been appointed to facilitate the setting and achievement of BREEAM performance targets for the project. Their involvement must be early in the design process. The defined BREEAM performance targets have been formally agreed between the client and design/project team no later than the concept design stage. The BREEAM AP must demonstrate targets have been achieved via a BREEAM Assessor's design stage assessment report. <u>Comments & Actions</u> SRE can provide this for an additional fee
4	BREEAM AP – Monitoring Progress	1	0	BREEAM AP – Monitoring Progress (1 credit) Completed BEFORE end of RIBA Stage 4 Targeted – No (Potential) The credit for BREEAM AP – Concept Design must be achieved. A BREEAM AP has been appointed to monitor progress against the BREEAM performance targets throughout the design process and formally report progress to the client and design team. The BREEAM AP must attend key project and design team meetings during the concept design, developed design and technical design stages. Reporting must be carried out for each stage, as a minimum. <u>Comments & Actions</u> SRE can provide this for an additional fee

Credit	Available	Targeted	Potential	Comments	
Man 02 - Life cycle cost and service life planning					
1	Elemental LCC options appraisal	2	0	2	Elemental LCC options appraisal (2 credits) Completed BEFORE end of RIBA Stage 2 Targeted – No (Potential) A competent person carries out an outline, entire asset elemental life cycle cost (LCC) options appraisal (at least two) at the Concept Design stage in line with ISO 15686-5:2017. The elemental LCC plan: a. Provides an indication of future replacement costs over a period of analysis as required by the client (e.g. 20, 30, 50 or 60 years); b. Includes service life, maintenance and operation cost estimates. <i>The study period should ideally be agreed by the client, in line with the design life expectancy of the building. However, where the life expectancy of the building is not yet formally agreed (due to being at very early design stages), the default design life of 60 years should be used for modelling purposes (in line with the UK default).</i> Demonstrate, using appropriate examples provided by the design team, how the elemental LCC plan has been used to influence building and systems design and specification to minimise life cycle costs and maximise critical value. Comments & Actions • SRE have been appointed as the suitably qualified individual to perform Elemental LCC calculations before the end of Concept Design (RIBA Stage 2). • The ELCC report will be required prior to the end of Concept Design, as well as evidence to confirm how the ELCC has influenced building and systems design and specifications.
2	Component level LCC options appraisal	1	0	1	Component level LCC options appraisal (1 credit) Completed BEFORE end of RIBA Stage 4 Targeted – No (Potential)

Credit	Available	Targeted	Potential	Comments
				A competent person develops a component level LCC options appraisal (at least two) by the end of Technical Design stage in line with ISO 15686-5:2017, and includes the following component types (where present): - Envelope, e.g. cladding, windows, or roofing - Services, e.g. heat source, cooling source, or controls, also intelligent lighting controls against standard controls. - Finishes, e.g. walls, floors or ceilings - External spaces, e.g. alternative hard landscaping, boundary protection. <i>The component level LCC option appraisal should review all of the above component types (where present). However, you do not need to consider every single example cited under each component; only a selection of those most likely to draw valued comparisons. This is to ensure that a wide range of options are considered and help focus the analysis on components which would benefit the most from appraisal.</i> Demonstrate, using appropriate examples provided by the design team, how the component level LCC options appraisal has been used to influence building and systems design and specification to minimise life cycle costs and maximise critical value. Component Level LCC: This is commonly used for cost planning specification choices of systems or component levels during the design development. Component level LCC options appraisal for service life planning requires the environment of the building and other local conditions to be identified and the fundamental requirements to be met in planning the service life of the building. Decisions should be made on: - The likely design of the building (rather than the contractual design itself). - Minimum functional performance criteria for each component over the buildings design life. - Components that must be repairable, maintainable or replaceable within the design of the building. Only the key differentiators between components and systems need to be comparatively modelled. <u>Comments & Actions</u> <i>Client or Project Team to appoint a competent individual to undertake a component level LCC options appraisal.</i>

Credit		Available	Targeted	Potential	Comments
					SRE can provide this service for an additional fee, if required.
3	Capital Cost Reporting	1	1	0	Capital Cost Reporting (1 credit) Targeted – Yes Report the capital cost for the building in pounds per square meter (£/m²) of gross internal area (GIA). Written confirmation of the anticipated cost is to be provided during the Design Stage, with final confirmation of the actual cost provided at the end of the project during the Post-Construction Stage assessment. The capital cost for the building includes the expenses related to the initial construction of the building: - Construction, including preparatory works, materials, equipment and labour - Site management - Construction financing - Insurance and taxes during construction - Inspection and testing Costs relating to land procurement, clearance, design, statutory approvals and post occupancy aftercare are not included. Comments & Actions - Quantity Surveyor to confirm that written confirmation of the final capital cost of the project in £k/m² will be provided.
Man 03 - Responsible construction					
Pre-req	Prerequisite Legal and sustainable site timber	✓	✓	✗	Prerequisite: Legal and sustainable site timber All temporary site timber and timber-based products (excluding reused timber) used during the construction process of the project must be legal and sustainable timber.
1	Environmental management	1	1	0	Environmental management (1 credit) Targeted – Yes All parties who manage the construction site at any stage must operate an EMS covering their main operations. The EMS must be third-party certified to ISO 14001, EMAS (EU Eco-Management and Audit Scheme), or an equivalent standard.

Credit	Available	Targeted	Potential	Comments	
				All parties who manage the construction site at any stage must implement best practice pollution prevention policies and procedures on site in order to minimise air and water pollution during construction works. <u>Comments & Actions</u> <i>Client to ensure that the Main Contractor and Demolition Contractors appointed have ISO 14001/EMAS certification, and the commitment to implementing Pollution Prevention Guideline (PPG6) has been made.</i>	
2	BREEAM Advisory Professional – Site	1	0	1	BREEAM Advisory Professional - Site (1 credit) Targeted – No (Potential) The client must formally agree with the contractor the performance targets relating to the BREEAM certification that have been set for the project. A BREEAM AP must be involved in the project at an appropriate time and level to ensure that the agreed performance targets are met. Specifically, the AP must: a. Work with the project team, including the client, to help them maximize performance against the agreed targets throughout construction, handover and closeout. This support will include considering links between the criteria that need to be met across all project areas to be assessed by BREEAM (e.g., Management, Energy, Ecology etc), going beyond the design intent wherever possible. b. Monitor progress against the agreed performance targets throughout all stages of the construction, paying particular attention wherever decisions are made that could critically impact the BREEAM performance, and keeping all records needed as evidence for the assessment. c. Proactively identify risks and opportunities related to the procurement and construction processes and the achievement of the targets agreed above. d. Feedback promptly and regularly to the contractor and project team helping the project stay on track to meet its targets and supporting any necessary corrective actions. Where appropriate, coordinate and help the project team to provide the assessor with the necessary evidence to achieve the credits.

Credit	Available	Targeted	Potential	Comments
				To achieve this credit at the final post-construction stage of assessment, the submitted assessors report must show that a BREEAM AP was appointed and that the agreed performance targets have been demonstrably achieved by the project. <u>Comments & Actions</u> <i>This credit is not sought at this stage.</i> <i>Main Contractor to ensure that a BREEAM AP is appointed during the construction stage to ensure that performance standards are achieved.</i> <i>SRE can provide this service for an additional fee.</i>
3	Responsible construction management	2	2	0 Responsible construction management (2 credits) Minimum standard to achieve one credit for 'Excellent' target rating OR two credits for 'Outstanding' target rating Targeted – Yes (2 credits) For small-scale projects: - The contractor must achieve items below: - Implement practices to ensure the development footprint is safe, clean and organised at all times. This includes, but is not limited to, facilities, materials and waste storage (f). - Provide processes and equipment required to respond to medical emergencies (h). - Identify and implement initiatives to promote and maintain the health and wellbeing of all site operatives within the development footprint. This can involve site facilities, site management arrangements, staff policies etc (i). - Establish management practices and facilities encouraging equality, fair treatment and respect of all site operatives and visitors (j). - Minimising nuisance and intrusion on the lives of the local community, and engaging with the community and neighbourhood to ensure that any unavoidable impacts of construction are communicated regularly and sensitively (m)

Credit	Available	Targeted	Potential	Comments
				b. Where the contractor achieves those items checked as required for one credit (for standard projects), the small-scale project may achieve two credits. All buildings not defined as small-scale projects are considered to be standard projects and credits are awarded as follows: a. 1 credit: All items below achieve (for standard projects) must be achieved for one credit to be awarded: (Targeted) i. Manage the construction site entrance to minimise the impacts (e.g. safety, disruption) arising from vehicles approaching and leaving the development footprint (a). ii. Minimise the risks of air, land and water pollution (for EU Taxonomy compliance (d). iii. Minimise the risks of nuisance from vibration, light and noise pollution (e). iv. Implement practices to ensure the development footprint is safe, clean and organised at all times. This includes, but is not limited to, facilities, materials and waste storage (f). v. Ensure clear and safe access in and around the buildings at the point of handover (g). vi. Provide processes and equipment required to respond to medical emergencies (h). vii. Identify and implement initiatives to promote and maintain the health and wellbeing of all site operatives within the development footprint. This can involve site facilities, site management arrangements, staff policies etc (i). viii. Establish management practices and facilities encouraging equality, fair treatment and respect of all site operatives and visitors (j). ix. Minimising nuisance and intrusion on the lives of the local community, and engaging with the community and neighbourhood to ensure that any unavoidable impacts of construction are communicated regularly and sensitively (m) x. All visitor, workforce and community accidents, incidents and near misses are recorded and action is taken to reduce the likelihood of them reoccurring (r). b. 2 credits: Projects achieving the criterion above PLUS six additional items from below, may be awarded a second credit: i. Ensure the development footprint is accessible for delivery vehicles fitted with safety features (e.g. side under run protection) to remove

Credit	Available	Targeted	Potential	Comments
				or limit the need for on-street loading or unloading. Where on-street loading is unavoidable, this should be appropriately managed (b). ii. Identify access routes to the development footprint, including for heavy vehicles to minimise traffic disruption and safety risks to others (c). iii. Provide secure, clean and organised facilities (e.g. welfare, changing and storage facilities) for site operatives within the development footprint (k). iv. Minimise risks of the site becoming a focus for antisocial behaviour in the local community (e.g. robust perimeter fencing, CCTV, avoid creating dark corners etc.) (l). v. Ensuring ongoing and up-to-date training is provided for personnel and visitors (covering items a to l, as appropriate.) (n). vi. Ensuring all site operatives are trained for the tasks they are undertaking (including any site-specific considerations) (o). vii. Promoting safety on and off-site by ensuring driving and operator training and safety awareness have been undertaken for any company vehicles (cars and vans), movable plant and equipment (such as dumpers, diggers, cranes), trucks, lorries or waste removal wagons whether owned, leased or hired by the principal contractor (p). viii. Any vehicular accidents, incidents and near misses, on-site or in the vicinity of the site entrance and relating to site activities, are recorded, investigated and analysed and that learnings are incorporated in updated policies and training (q). ix. Processes are in place to facilitate collecting and recording feedback from the community and to address any concerns related to the development footprint (s). If the activities listed above are not relevant for the development, then the project team should provide adequate evidence to the assessor to demonstrate why the project is compliant without these items having been achieved. <u>Comments & Actions</u> Project team to provide signed letter of commitment demonstrating specifically which responsible management items will be fulfilled.

	Credit	Available	Targeted	Potential	Comments
4	Site monitoring	2	2	0	Site monitoring (2 credits) Targeted – Yes Assign responsibility for site monitoring to a named individual. This is a prerequisite for the award of any of the site monitoring credits as set out below. The responsible individual must have the appropriate authority and experience to access the data required. They may be the BREEAM AP, where one has been appointed. They will be required to monitor, record and report energy use, water consumption and transportation data (where measured) resulting from all on-site construction processes (and dedicated off-site manufacturing) throughout the build programme. Report the project value. One credit – Monitoring utility consumption <i>Energy consumption</i> Set targets at design stage for the site energy consumption in kWh (and where relevant, litres of fuel used) resulting from the use of construction plant, equipment (mobile and fixed) and site accommodation. Monitor and record data for the energy consumption and show that the consumption targets have been achieved. Report the total carbon dioxide emissions (total kgCO₂e) and energy consumption (electricity in kWh or litres of fuel) resulting from the construction process. <i>Water consumption</i> Set targets at design stage for the potable water consumption (m³) arising from the use of construction plant, equipment (mobile and fixed) and site accommodation. Monitor and record data for the potable water consumption and show that the consumption targets have been achieved. Use the collated data to report the total net water consumption resulting from the construction process (m³), i.e. consumption minus any recycled water use. One credit – Monitoring transport of construction materials and waste Set targets at design stage and monitor and record data relating to transport movements and other impacts resulting from delivery of the majority of construction

Credit		Available	Targeted	Potential	Comments
					materials to the site and removal of construction waste from the site. As a minimum this must cover: - Transport of materials from the point of supply to the building site, including any transport, intermediate storage and point of supply. - The scope of this monitoring must cover the materials used within the following as a minimum: - Superstructure - Internal finishes - Substructure and hard landscaping - Core building services - Transport of construction waste from the construction gate to waste disposal processing or recovery centre gate. Monitoring must cover the construction waste groups outlined in the project's resource management plan. Using the collated data, report separately for materials and waste, the total transport-related carbon dioxide emissions (kgCO₂e), plus total distance travelled (km) and amount of fuel used (litres). Comments & Actions - Project Team to ensure the appointed Main Contractor commits to monitoring energy and water (one credit – Targeted) and transport of materials on site and transport of waste (one credit – Targeted).
e1	Responsible construction management - Exemplary credit	1	0	0	Comments & Actions Credit not sought.
Man 04 - Commissioning and handover					
Pre-req	Minimum standard - Handover	✓	✓		Prerequisite: Minimum standard to achieve 'Very Good' target rating – Handover Prepare two training schedules timed appropriately around handover and proposed occupation plans for the following users: - A non-technical training schedule for the building occupiers. - A technical training schedule for the premises facilities managers.

Credit	Available	Targeted	Potential	Comments
1	Schedule and responsibilities	1	1	Schedule and responsibilities (1 credit) Minimum Standard to achieve 'Very Good' target rating Targeted – Yes Prepare a schedule of commissioning and testing. The schedule identifies and includes a suitable timescale for commissioning and re-commissioning of all complex and non-complex building services and control systems and for testing and inspecting building fabric. The schedule identifies the appropriate standards for all commissioning activities to be conducted, where applicable, in accordance with: a. Current Building Regulations . b. BSRIA guidelines(5). c. CIBSE guidelines(6). d. Other appropriate standards (see CN1 on page 68). Any process or manufacturing-related equipment specified as part of the project can be excluded from the assessment, except where it forms an integral part of building HVAC services, such as some heat recovery systems. Where a building management system (BMS) is specified: a. Carry out commissioning of air and water systems when all control devices are installed, wired and functional. b. Include physical measurements of room temperatures, off-coil temperatures and other key parameters, as appropriate, in commissioning results. c. The BMS or controls installation should be running in auto with satisfactory internal conditions prior to handover. d. All BMS schematics and graphics (if BMS is present) are fully installed and functional to user interface prior to handover. e. Fully train the occupier or facilities team in the operation of the system. Appoint an appropriate project team member to monitor and programme pre-commissioning, commissioning and testing. Where necessary include re-commissioning activities on behalf of the client. The principal contractor accounts for the commissioning and testing programme, responsibilities and criteria within their budget and the main programme of works. Allow the required time to complete all commissioning and testing activities prior to handover.

Credit	Available	Targeted	Potential	Comments	
				<u>Comments & Actions</u> • <i>Project Team to ensure the appointed Main Contractor will account for a commissioning and testing schedule within the project's budget and ensure that these are provided at the post-construction stage.</i> • <i>Prepare and deliver a commissioning schedule (where available).</i>	
2	Commissioning role	1	1	0	Commissioning role (1 credit) Targeted – Yes Achieve the schedule and responsibilities credit. During the design stage, the client or the principal contractor appoints an appropriate project team member, provided they are not involved in the general installation works for the building services systems, with responsibility for: a. Undertaking design reviews and giving advice on suitability for ease of commissioning. b. Providing commissioning management input to construction programming and during installation stages. c. Management of commissioning, performance testing and handover or post-handover stages. For buildings with complex building services and systems, this role needs to be carried out by a specialist commissioning manager. <u>Comments & Actions</u> • <i>Project Team to deliver signed letter confirming appointment of specialist commissioning manager.</i> • <i>Provide the relevant documentation confirming the appointed commissioning manager meets the definition for the role. i.e. membership of the Commissioning Specialists Association (CSA).</i>
3	Envelope testing	1	1	0	Envelope testing (1 credit) Targeted – Yes

	Credit	Available	Targeted	Potential	Comments
					Rectify any defects identified during post-construction testing and inspection prior to building handover and close out. Any remedial work must meet the required performance characteristics for the building or element as defined at the design stage. Achieve the schedule and responsibilities credit. Complete post-construction testing and inspection to quality-assure the integrity of the building fabric, including continuity of insulation, avoidance of thermal bridging and air leakage paths (this is through airtightness testing and a thermographic survey). A suitably qualified professional undertakes the survey and testing in accordance with the appropriate standard. For EU taxonomy alignment, please see. <u>Comments & Actions</u> Project team to ensure main contractor commits to produce a thermographic survey and air leakage report at post-construction stage.
4	Handover	1	1	0	Handover (1 credit) Targeted – Yes Prior to handover, develop two building user guides for the following users: - A non-technical user guide for distribution to the building occupiers. - A technical user guide for the premises facilities managers. A draft copy is developed and discussed with users first (where the building occupants are known) to ensure the guide is most appropriate and useful to potential users Prepare two training schedules timed appropriately around handover and proposed occupation plans for the following users: - A non-technical training schedule for the building occupiers. - A technical training schedule for the premises facilities managers. <u>Comments & Actions</u> - BUGs and training schedules will be required from the Main Contractor at the Post-construction stage, before handover takes place. The Main Contractor must commit to producing and discussing the BUG with building users, and

Credit		Available	Targeted	Potential	Comments
					<i>providing the relevant training to building users in line with the training schedule, prior to handover.</i> <i>Draft BUGs and training schedules should be provided at the design stage, where available.</i> <i>SRE can provide this service for an additional fee.</i>
Man 05 - Aftercare					
1	Aftercare Support	1	1	0	Aftercare support (1 credits) Targeted – Yes Provide aftercare support to the building occupiers through having in place operational infrastructure and resources. This includes as a minimum: a. A meeting between the aftercare support team or individual, and the building occupier or management team (prior to initial occupation, or as soon as possible thereafter) to: i. Introduce the aftercare support available, including the content of the building user guide (where it exists) and training schedule. ii. Present key information about features of the building including the design intent and how to use the building to ensure it operates as efficiently and effectively as possible. b. On-site facilities management training including: i. a walkabout of the building. AND ii. introduction to and familiarisation with the building systems, their controls and how to operate them in accordance with the design intent and operational demands. c. Provide initial aftercare support for at least the first month of building occupation, e.g. weekly attendance on-site, to support building users and management (the level of frequency will depend on the complexity of the building and building operations). d. Provide longer term aftercare support for occupiers for at least the first 12 months from occupation, e.g. a helpline, nominated individual or other appropriate system to support building users and management.

	Credit	Available	Targeted	Potential	Comments
					Establish operational infrastructure and resources to coordinate the collection and monitoring of energy and water consumption data for a minimum of 12 months, once the building is substantially occupied. This facilitates analysis of discrepancies between actual and predicted performance, with a view to adjusting systems and user behaviours accordingly. <u>Comments & Actions</u> Project Team to ensure the appointed Main Contractor commits to the above.
2	In-use-commissioning	1	1	0	In Use Commissioning (1 credit) Targeted – Yes Complete the following commissioning activities over a minimum 12-month period, once the building becomes substantially occupied: a. Complex systems: The specialist commissioning manager will: i. Identify changes made by the owner or operator that might have caused impaired or improved performance. ii. Test all building services under full and part-load load conditions. iii. Where applicable, carry out testing during periods of extreme (high or low) occupancy. iv. Interview building occupants (where they are affected by the complex services) to identify problems or concerns regarding the effectiveness of the systems. v. Compare sub-metered energy performance to the predicted energy performance. vi. Identify inefficiencies and areas in need of improvement. vii. Re-commission systems (following any work needed to serve revised loads) and incorporate any revisions in operating procedures into the operations and maintenance (O&M) manuals. - viii. b. Simple systems: The external consultant, aftercare team, or facilities manager will: i. Review thermal comfort, ventilation, and lighting, at three, six and nine month intervals after initial occupation, either by measurement or occupant feedback. ii. Identify deficiencies and areas in need of improvement. iii. Re-commission systems and incorporate any relevant revisions in operating procedures into the O&M manuals.

Credit	Available	Targeted	Potential	Comments
				<u>Comments & Actions</u> Project Team to ensure the appointed Main Contractor commits to the above.
3	Post-occupancy evaluation	1	1	0
				Post Occupancy Evaluation (POE) (1 credit) Targeted – Yes Complete to carry out a post-occupancy evaluation (POE) exercise one year after the building is substantially occupied which gains comprehensive in-use performance feedback and identifies gaps between design intent and in-use performance. The aim is to highlight any improvements or interventions that need to be made and to inform operational processes. An independent party should carry out the POE to cover: a. A review of the design intent and construction process (review of design, procurement, construction and handover processes). b. Feedback from a wide range of building users including facilities management on the design and environmental conditions of the building covering: i. Internal environmental conditions (light, noise, temperature, air quality). ii. Control, operation and maintenance. iii. Facilities and amenities. iv. Access and layout. v. Energy and water consumption (see criterion 2 and M1). vi. Other relevant issues, where appropriate. The independent party provides a report with lessons learned to the client and building occupiers. The client or building occupier commits funds to pay for the POE in advance. This requires an independent party to be appointed to carry out the POE as described above. <u>Comments & Actions</u> - Project Team to ensure the appointed Main Contractor commits to the above.

Credit		Available	Targeted	Potential	Comments
e1	Zero carbon transition planning	1	0	0	Comments & Actions Credit not sought.
		21	15	6	Standard Management Credit Total
		2	0	0	Exemplary Management Credit Total
		12.92	7.80	3.12	% Management Total (Standard + Exemplary)
Health & Wellbeing (1.25 % per Credit)					
Hea 01 - Natural light					
Pre-req	Minimum standard - Natural light	✓	✓		Prerequisite: Minimum standard for 'Outstanding' target rating - Natural light Achieve one of the following: - At least 95% of all <i>relevant building areas</i> for daylight, have vertical and/or inclined windows with a glazed area 20% of the surrounding wall area. OR - At least 80% of <i>relevant building areas</i> for daylight have a glazed area as a percentage of floor area 7%. Comments & Action It is assumed the glazing will meet requirements.
1	Glare Control	1	1	0	Glare control – credit targeted by default as there are no relevant areas Identify areas at risk of glare using a glare control assessment. The glare control assessment also justifies any areas deemed not at risk of glare. Where risk has been identified within a relevant building area , a glare control strategy is used to design out the potential for glare. The glare control strategy does not increase energy consumption used for lighting. This is achieved by:

Credit	Available	Targeted	Potential	Comments	
				a. Maximising daylight levels in all weather (cloudy or sunny). AND b. Ensuring the use or location of shading does not conflict with the operation of lighting control systems. The relevant building areas are defined as the below: Glare control criteria apply to areas of the building where resultant glare could be problematic for users. This includes, but not exclusively: • Areas that have been designed to contain or use workstations or projector screens (such as offices, study bedrooms, libraries, facility management offices and reception desks). • Areas where people must spend time in fixed locations and cannot change their viewing direction (such as classrooms and hospital wards). • Sports halls. • Areas where occupants are expected to spend a significant amount of time in the day (such as care home bedrooms). <u>Comments & Action</u> It is assumed the required glare control will not be required as there are no relevant building areas.	
2	Daylighting	1	1	0	Daylighting (1 credit) Targeted – Yes Daylighting criteria have been met for Industrial developments using either one of the options outlined below: OPTION 1 • The *relevant building areas meet good practice average and minimum point daylight illuminance criteria as outlined below:

Credit	Available	Targeted	Potential	Comments	
				- <u>Internal association or atrium area</u>: 80% of the area achieves an average daylight illuminance of at least 300 lux for 2650 hours per year or more AND achieves minimum point daylight illuminance of at least 210 lux for 2650 hours per year or more. - <u>Teaching, lecture and seminar spaces</u>: 80% of the area achieves an average daylight illuminance of at least 300 lux for 2000 hours per year or more AND achieves minimum point daylight illuminance of at least 90 lux for 2000 hours per year or more. - <u>All occupied spaces</u>: 80% of the area achieves an average daylight illuminance of at least 300 lux for 2000 hours per year or more AND achieves minimum point daylight illuminance of at least 90 lux for 2000 hours per year or more. OPTION 2 • The relevant building areas meet any level of recommendation using the daylight illuminance criteria in EN 17037. OPTION 3 • The relevant building areas achieve at least 'nominally accepted' daylight sufficiency as per IES LM-83. *Relevant building area – Areas within the building where good daylighting is of benefit to the building users, if it is an occupied space (i.e a room or space within the assessed building that is likely to be occupied for 30 minutes or more by a building user). <u>Comments & Actions</u> <i>SRE can perform the daylight modelling (ideally before planning) to confirm the occupied spaces of the development achieve the above daylighting levels[EG1].</i>	
4	View out	1	1	0	Glare control – credit targeted by default as there are no relevant areas Relevant areas are spaces where close work in a fixed position is carried out for sustained periods of time. The view out criteria is therefore not applicable to occupied areas such as meeting rooms, or other spaces where such close work is not being carried out. BREEAM defines relevant building areas requiring a view out to include spaces where close work in a fixed position is carried out for sustained periods of time: 1. There are or will be workstations or benches or desks for building users. 2. Close work will be undertaken or visual aids will be used.

Credit	Available	Targeted	Potential	Comments										
				3. Occupants spend a significant amount of time, and a view out is deemed to be of benefit to the building occupants, this includes: a. Bedrooms (Residential care home) b. Living rooms (Residential institution – long-term stay, and Residential) Excluded areas for view out might include: - Conference rooms, meeting rooms, lecture theatres, sports halls, acute SEN rooms, kitchens. - Any spaces where the exclusion or limitation of natural light is a functional requirement (such as laboratories or media spaces). - Individual booths or enclosed workstations that are intended for temporary non-permanent work. - Bedrooms where occupants mainly use the space for sleeping, such as in hospitality, residential and residential institutions (long- and short-term stay) and bedrooms that are not specified above and in building type specific note 2.1. If the scope of the project changes, these are the requirements (for information): At least 95% of the floor area in 95% of spaces for each relevant building area are within the distances of a window or permanent opening that provides an adequate view out in line with the below: <table><tr><th>Distance from window to workspace or desk, X (in metres)</th><th>Window or opening size (as % of surrounding wall area)</th></tr><tr><td>X < 8</td><td>20%</td></tr><tr><td>8 ≤ X ≤ 11</td><td>25%</td></tr><tr><td>11 < X ≤ 14</td><td>30%</td></tr><tr><td>X > 14</td><td>35%</td></tr></table> OR At least 75% of the floor area in 95% of spaces for each relevant building area can meet both of the following criteria: a. Horizontal sight angle 28°	Distance from window to workspace or desk, X (in metres)	Window or opening size (as % of surrounding wall area)	X < 8	20%	8 ≤ X ≤ 11	25%	11 < X ≤ 14	30%	X > 14	35%
Distance from window to workspace or desk, X (in metres)	Window or opening size (as % of surrounding wall area)													
X < 8	20%													
8 ≤ X ≤ 11	25%													
11 < X ≤ 14	30%													
X > 14	35%													

Credit	Available	Targeted	Potential	Comments	
				AND b. The landscape layer and at least one additional layer (sky or ground) are visible through a permanent opening. <u>Comments & Actions</u> Architect and SRE to confirm whether the above criteria are achievable for the Proposed Development. <u>Comments & Action</u> It is assumed there are no relevant building areas and therefore this credit is met by default.	
e1	Evaluating glare from daylight – Exemplary credit	1	0	0	Glare control - Exemplary credit (1 credit) The above credit for 'Glare control' should be achieved. An evaluation should be undertaken to demonstrate compliance with either of the following and M6 from the BREEAM manual: a. The Daylight Glare Probability (DGP) does not exceed 0.40 over more than 5% of annual operating hours at all workstations in all relevant building areas. OR b. Annual Sunlight Exposure ASE1000, $250 \leq 10\%$ of an occupied space. This means no more than 10% of the occupied space in all relevant building areas can receive a daylight illuminance of ≥ 1000 lux for ≥ 250 hours per year. <u>Comments & Actions</u> Credit not sought.
e2	Daylighting - Exemplary credit	1	0	0	Daylighting - Exemplary credit (1 credit) Targeted – No (Potential) Daylighting criteria have been met using EITHER one of the following options:

Credit	Available	Targeted	Potential	Comments
				OPTION 1 a. Relevant building areas meet exemplary criteria for average and minimum point daylight illuminance as outlined below: i. <u>All occupied spaces</u>: 80% of the area achieves an average daylight illuminance of at least 300 lux for 2650 hours per year or more AND achieves minimum point daylight illuminance of at least 90 lux for 2650 hours per year or more. OPTION 2 b. Relevant building areas meet the highest rating in EN 17037:2018+A1:2021 OR IES LM-83-23 and the relevant criteria outlined above (a.i): i. Highest rating in standard is met. <u>Comments & Actions</u> <i>This credit is not sought at this stage due to high benchmarks.</i>
Hea 02 - Artificial light				
Pre-req	Prerequisite Flicker	✔	✔	Prerequisite: Flicker All lighting types should be designed to avoid flicker and stroboscopic effects, including across their full dimming and colour tuning range if applicable. This is applicable to all internal and external lighting.
1	Internal and external lighting levels	1	1	0
				Internal and external lighting levels (1 credit) Targeted – Yes <i>Internal lighting</i> Internal lighting in all relevant areas of the building is designed to provide illuminance (lux) levels and colouring rendering index in accordance with the SLL Code for Lighting 2022(24) and any other relevant industry standard. Internal lighting should be appropriate to the tasks undertaken, accounting for building user concentration and comfort levels. Compliance criteria should include, as applicable for each type of application: a. Illuminance levels and uniformity b. Glare limits c. Colour appearance (where standard recommendations exist)

Credit	Available	Targeted	Potential	Comments	
				d. Colour rendering For areas where computer screens are regularly used, the lighting design complies with CIBSE Lighting Guide 7 Sections 2.5, 2.15 to 2.17, 2.22, and 6.10 to 6.20.(25) This gives recommendations highlighting: a. Limits to the luminance of the luminaires to avoid screen reflections. (Manufacturers data for the luminaires should be sought to confirm this.) b. Any area where a surface is used to reflect light in to a space, such as uplighting, the recommendations refer to the luminance of the lit ceiling rather than the luminaire; a design team calculation is usually required to demonstrate this. c. Recommendations for direct lighting, ceiling illuminance, and average wall illuminance. <i>External lighting</i> All external lighting located within the construction zone is specified in accordance with BS 5489-1:2020(26) and BS EN 12464-2:2024(27). External lighting should provide illuminance levels that enable users to perform outdoor visual tasks efficiently and accurately, especially during the night. Compliance criteria should include, as applicable for each type of application: a. Illuminance / luminance levels and uniformity b. Glare limits c. Colour rendering <u>Comments & Actions</u> • <i>Project Team building services engineer or lighting designer to confirm internal lighting is designed in accordance with SLL code for lighting, and all external lighting is designed to comply with BS 5489-1:2020(26) and BS EN 12464-2:2024(27).</i> • <i>Deliver design drawings and lighting schedules in line with the standards.</i>	
2	Zoning and occupant control	1	0	1	Zoning and control (1 credit) Targeted – No (Potential)

Credit	Available	Targeted	Potential	Comments
				Internal lighting is zoned to allow for occupant control in accordance with the criteria below for relevant areas present within the building, as applicable: - Workstations adjacent to windows or atria and other building areas are separately zoned and controlled - In office areas where furniture layout is known, zones of no more than four workplaces - Seminar and lecture rooms: zoned for presentation and audience areas - Library spaces: separate zoning of stacks, reading and counter areas - Teaching space or demonstration area - Whiteboard or display screen - Auditoria: zoning of seating areas, circulation space and lectern area - Dining, restaurant, café areas: separate zoning of servery and seating or dining areas - Retail: separate zoning of display and counter areas - Bar areas: separate zoning of bar and seating areas - Wards or bedded areas: zoned lighting control for individual bed spaces and control for staff over groups of bed spaces - Treatment areas, dayrooms, waiting areas: zoning of seating and activity areas and circulation space with controls accessible to staff. Where automatic lighting controls are used for energy efficiency reasons, manual override must be provided. <u>Comments & Actions</u> <i>Project Team building services engineer or lighting designer to confirm internal lighting is designed in accordance with the above – zoned appropriately[EG2].</i>
e1	Lighting control – Exemplary credit	1	0	Lighting in each control zone with an occupied space can be manually dimmed by occupants down to no more than 20% of the maximum light output using lighting control interfaces positioned in accessible locations. Lighting in each control zone within an occupied space can be colour tuned over a correlated colour temperature range from 2700K or less to 4000K or more, with automatic controls set to limit the correlated colour temperature in the afternoon and evening to 2700K or less. <u>Comments & Actions</u>

Credit	Available	Targeted	Potential	Comments	
				Credit not sought.	
Hea 03 Non-visual effects of light					
1	Non-visual effects of light	1	1	1	Non-visual effects of light – not applicable as this building does not have any relevant areas. This credit is awarded by default. If it becomes relevant, the criteria are: Achieve at least one credit for 'Daylighting' in Hea 01 Natural light. All relevant areas achieve one of the below, as applicable: - Where occupant positions are known and fixed (see M1.1): All positions in all relevant building areas receive a vertical illuminance of at least 250 lux melanopic EDI at occupant eyes for at least four hours during the daytime (beginning by noon at the latest). - Where occupant positions are unknown or variable (see M1.2): Cylindrical illuminance at eye height across each relevant building area corresponds to at least 250 lux melanopic EDI for at least four hours during the daytime (beginning by noon at the latest). Electric lighting systems and controls are in place to adjust the flux and spectral output of the emitted light over time (colour tuning) so that melanopic EDI at occupant eye level can be reduced in the afternoon and evening, as relevant for each type of application. <u>Comments & Actions</u> - Credit is awarded by default as there are no relevant areas.
Hea 04 - Indoor air quality					
1	Indoor air quality plan	1	1	0	Indoor air quality plan – not applicable as this building does not have an office or other occupied space, therefore the credit is awarded by default. If the credit becomes applicable (addition of occupied areas), the below criteria will apply: Minimum standard to achieve ‘Very Good’ target rating Targeted – Yes

Credit	Available	Targeted	Potential	Comments
				A site-specific indoor air quality plan has been produced in accordance with Guidance Note 6 (GN06). This plan informs the design, specification, and installation to maximise improvement of indoor air quality during occupation. The plan must consider the following: a. Removal of highly contaminating sources b. Dilution and control of other contaminant sources, including: i. Air quality requirements of specialist areas such as laboratories, where present c. Procedures for pre-occupancy flush out and purge ventilation d. Third party testing and analysis e. Maintaining indoor air quality in-use f. Any relevant local or national authority plans or policies (for example, Air Quality Management Areas or Local Air Quality Action Plans) <u>Comments & Actions</u> • SRE can provide a compliant Indoor Air Quality Plan (IAQP).
2	Ventilation	0	0	Ventilation – not applicable as this building does not have an office or other occupied space. Not applicable The building has been designed to minimise the concentration and recirculation of pollutants in the building as follows: Provide fresh air into the building in accordance with one of the best practice standards for ventilation: <u>Clinical areas with controlled environmental conditions</u> a. BS ISO 17772-1:2017 (excluding naturally ventilated buildings), whichever requires the higher performance. <u>All other buildings (mixed mode or mechanical ventilation)</u> a. BS ISO 17772-1:2017 Annex I. <u>All other buildings (naturally ventilated)</u> a. CIBSE AM10. Ventilation pathways are designed to minimise the ingress and build-up of air pollutants inside the building:

Credit	Available	Targeted	Potential	Comments
				<i>Mechanically ventilated</i> The design of air-conditioned and mixed mode buildings must minimise the build-up of air pollutants. Locations of ventilation intakes and airflow pathways should be designed in accordance with one or a combination of the following methods: METHOD 1 1. Locating the building's air intakes and exhausts, in relation to each other and sources of external pollution, in accordance with the following best practice as appropriate: a. PDCEN/TR 16798-4:2017 Sections 8.8.1 to 8.8.4 b. b. BRE FB 30 Ventilation for healthy buildings: Reducing the impact of urban air pollution (2011) c. c. BRE IP 9/14 Locating ventilation inlets to reduce ingress of external pollutants into buildings, as appropriate d. CIBSE TM21 METHOD 2 2. Pollutant dispersion modelling can be used to inform the location of the building's air intakes and exhausts in relation to each other and sources of external pollution. This can be achieved using either wind tunnel modelling or numerical modelling. Undertaken by a competent person. METHOD 3 3. Positioning the building's air intakes and exhausts at least 10 m of horizontal distance apart. Positioning intakes at least 10 m horizontal distance from sources of external pollution (including the location of air exhausts from other buildings). There is no minimum vertical distance set in this approach. The building's air intakes and exhausts should be located to reduce the risk of the intake air being contaminated by the exhausts. Exhausts or other pollutant sources should not be discharged into enclosed spaces, such as courtyards, in which intakes are also located. Where significant levels of gaseous pollutants such as nitrogen dioxide are identified in the outdoor air, as in an Air Quality Management Area (AQMA), the use of appropriate gas phase filtration in the building ventilation system should be considered. Design teams must ensure that filter performance is appropriate for the pollutant conditions experienced at the site

Credit	Available	Targeted	Potential	Comments	
				Where present, HVAC systems must incorporate suitable filtration to minimise external air pollution, as defined in BS EN 16798-3:2025 Section B.4.2. The specified filters should achieve supply air classification of at least SUP 2. The level of filtration required is dependent on the quality of the outdoor air. a. In mechanically ventilated buildings or spaces: sensors are linked to the mechanical ventilation system and provide demand-controlled ventilation to the space (Assumed). b. In naturally ventilated buildings or spaces: sensors either have the ability to alert the building owner or manager when CO2 levels exceed the recommended set point or are linked to controls with the ability to adjust the quantity of fresh air, i.e. automatic opening windows or roof vents. c. The total number of sensors, and the net internal area of relevant areas covered by the sensors, is reported via the BREEAM Platform. The ventilation strategy provides adequate ventilation rates throughout the year, including sufficient airflow rates in summer to prevent overheating and maintain required thermal comfort conditions, in accordance with: a. CIBSE AM10 (for naturally ventilated buildings) b. CIBSE AM13 (for mixed-mode buildings) (Assumed) <u>Comments & Actions</u> • <i>This credit is not sought at this stage.</i> • <i>Project team/MEP to confirm the ventilation system specified for the Proposed Development and that the above criteria will be met.</i>	
3	Emissions from construction products	2	2	0	Emissions from construction products Targeted – Yes Three of the five product types meet the emission limits, testing requirements and any additional requirements listed by the BRE: • Interior paints and coatings 1. Formaldehyde: $\leq 0.06 \text{ mg/m}^3$ 2. TVOC: $\leq 1.0 \text{ mg/m}^3$ 3. Category 1A and 1B carcinogens: $\leq 0.001 \text{ mg/m}^3$ • Wood-based products (including wood flooring)

Credit	Available	Targeted	Potential	Comments	
				1. Formaldehyde: $\leq 0.06 \text{ mg/m}^3$ (Non-MDF) / $\leq 0.06 \text{ mg/m}^3$ (MDF) 2. TVOC: $\leq 1.0 \text{ mg/m}^3$ 3. Category 1A and 1B carcinogens: $\leq 0.001 \text{ mg/m}^3$ • Flooring materials (including floor levelling compounds and resin flooring) 1. Formaldehyde: $\leq 0.06 \text{ mg/m}^3$ (Non-MDF) / $\leq 0.06 \text{ mg/m}^3$ (MDF) 2. TVOC: $\leq 1.0 \text{ mg/m}^3$ 3. Category 1A and 1B carcinogens: $\leq 0.001 \text{ mg/m}^3$ • Ceiling materials, wall materials, acoustic insulation and thermal insulation materials 1. Formaldehyde: $\leq 0.06 \text{ mg/m}^3$ (Non-MDF) / $\leq 0.06 \text{ mg/m}^3$ (MDF) 2. TVOC: $\leq 1.0 \text{ mg/m}^3$ 3. Category 1A and 1B carcinogens: $\leq 0.001 \text{ mg/m}^3$ • Interior adhesives and sealants (including flooring adhesives) 1. Formaldehyde: $\leq 0.06 \text{ mg/m}^3$ (Non-MDF) / $\leq 0.06 \text{ mg/m}^3$ (MDF) 2. TVOC: $\leq 1.0 \text{ mg/m}^3$ 3. Category 1A and 1B carcinogens: $\leq 0.001 \text{ mg/m}^3$	
Hea 05 Thermal Comfort					
1	Thermal comfort	0	0	0	Industrial (without offices) Where an industrial unit contains no office space and only an operational or storage area, this BREEAM issue does not apply. Comments & Actions • Credit not applicable.
Hea 06 - Acoustic performance					
1	Acoustic performance	3	3	0	Acoustic performance Targeted – Yes Pre-requisite A suitably qualified acoustician (SQA) is appointed to by the client at an appropriate stage to provide early advice on a. External sources of noise impacting the chosen site. b. Site layout and zoning of the building for good acoustics.

Credit	Available	Targeted	Potential	Comments
				c. Acoustic requirements for users with special hearing and communication needs. d. Acoustic treatment of different zones and façades. The building meets the appropriate acoustic performance standards and testing requirements for the acoustic principles of: (See 'Acoustic criteria' below for further details) a. Sound insulation b. Indoor ambient noise level c. Reverberation times – not applicable as there are no areas 'used for speech' <u>Indoor ambient noise levels:</u> Achieve indoor ambient noise levels that comply with national building regulations or 'good practice' levels outlined by the BRE. Testing: A programme of pre-completion acoustic testing is carried out by a compliant test body. <u>Sound Insulation:</u> Achieve sound insulation levels that comply with national building regulations or 'good practice' levels outlined by the BRE. Testing: A programme of pre-completion acoustic testing is carried out by a compliant test body. <u>Reverberation times – not applicable where there are no areas used for speech:</u> Achieve the requirements relating to reverberation times that comply with national building regulations or 'good practice' levels outlined by the BRE. Testing: A programme of pre-completion acoustic testing is carried out by a compliant test body. <u>Comments & Actions</u> A suitably qualified acoustician is appointed to undertake an acoustics assessment to show the indoor ambient noise level, sound insulation and

Credit		Available	Targeted	Potential	Comments
					<i>reverberation times (where applicable) are in accordance with the relevant guidelines.</i>
Hea 07 - Safe and accessible design					
1	Safe access	1	0	1	Safe access (1 credit) Targeted – No (potential) Where external site areas form part of the assessed development the following apply: Dedicated and safe cycle paths are provided from the site entrance to any cycle storage, and connect to off-site cycle paths where applicable. Dedicated and safe footpaths are provided on and around the site providing suitable links for the following: a. The site entrance to the building entrance b. Car parks (where present) to the building entrance c. The building to outdoor space d. Connecting to off-site paths where applicable. Pedestrian drop-off areas are designed off, or adjoining to, the access road and should provide direct access to other footpaths. Where vehicle delivery access and drop-off areas form part of the assessed development, the following apply: Delivery areas are not accessed through general parking areas and do not cross or share the following: a. Pedestrian and cyclist paths b. Outside amenity areas accessible to building users and general public. There is a dedicated parking or waiting area for goods vehicles with appropriate separation from the manoeuvring area and staff and visitor car parking. Parking and turning areas are designed for simple manoeuvring according to the type of delivery vehicle likely to access the site, thus avoiding the need for repeated shunting.

Credit	Available	Targeted	Potential	Comments
				<u>Comments & Actions</u> Project Team and Architect to deliver design drawings highlighting safe pedestrian and cycle routes, and other compliant features.
2	Outside space	0	0	Where it is not possible to provide outdoor space, due to statutory requirements, or other issues outside of the control of the developer, then these criteria will be filtered out. <u>Comments & Actions</u> Credit not applicable
Hea 08 - Security				
1	Security of site and building	1	0	Security of site and building (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – No (Potential) Assessment type specific note – For speculative developments, if the SQSS cannot make complete recommendations due to the speculative nature of the assessment, the credit is still achievable. The SQSS must confirm that they have addressed all parts of the project where feasible based on the information available to them at the time of the assessment. Regarding the occupiers' influence on security, the SQSS shall document their assumptions in the SNA. A suitably qualified security specialist (SQSS) must conduct an evidence-based security needs assessment (SNA) during or before Concept Design (RIBA Stage 2). The purpose of the SNA is to identify any security-relevant attributes of the proposed development, site context, and surrounding environment that may influence the security strategy. Based on the SNA findings, the SQSS must develop a set of security controls and design recommendations. These must directly address the specific threats and assets identified in the SNA. The agreed security controls and recommendations shall be incorporated into proposals and implemented in the as-built development. Any deviation from those controls and recommendations shall be justified and agreed with the SQSS. <u>Comments & Actions</u>

Credit		Available	Targeted	Potential	Comments
					This credit is a potential at this stage until further information is reviewed.
e1	Security rating scheme - Exemplary credit	1	0	0	Security rating scheme - Exemplary credit (1 credit) Targeted – No (Potential) A compliant risk-based security rating scheme has been used. The performance against the scheme has been confirmed by independent assessment and verification. <i>The Security of site and building credit must first be achieved for the exemplary credit to be awarded.</i> Comments & Actions - This credit is not sought at this stage. - Project Team to confirm whether a compliant security rating scheme has been used. - Provide a copy of the security rating scheme certificate from design stage.
		12	9	3	Standard Health & Wellbeing Credit Total
		6	0	2	Exemplary Health & Wellbeing Credit Total
		21.00	13.25	3.75	% Health & Wellbeing Total (Standard + Exemplary)
Energy (0.53 % per Credit)					
Ene 01 - Energy and carbon performance for regulated energy uses					
1	Calculated energy performance	9	5	2	Calculated energy performance (9 credits) Minimum Standard to achieve 'Excellent' target rating the Energy Performance Ratio (EPR_{NC}) must be ≥ 0.4 Targeted – Yes (5 credits, 2 potential) Calculate the overall Energy Performance Ratio (EPR_{NC}). Must achieve ≥ 0.4 EPR_{NC}. BREEAM uses the following three metrics to determine the overall energy performance improvement: Demand – the building's demand for heating and cooling per unit floor area (kWh/m² per year)

Credit		Available	Targeted	Potential	Comments
					b. Primary energy – energy consumption measured in primary energy per unit floor area (kWh/m ² per year) c. Carbon emissions – carbon emissions arising from energy use per unit floor area (kgCO ₂ e/m ² per year) Generate a BRUKL.inp file at the design stage, using an approved energy calculation software: - For Scotland: Non-domestic Technical Handbook 2023 - Section 6, Energy. Comments & Actions - SBEM energy modelling is to be undertaken by an energy specialist, to deliver the BRUKL file to determine the credits. - SRE can provide this service for an additional fee, if required.
e1	Beyond zero net regulated carbon - Exemplary credit	3	0	0	Comments & Actions This credit is not sought due to high benchmarks.
Ene 02 - Prediction of operational energy and carbon					
Pre-req	Minimum standard - No fossil fuels on-site	✓	✓		Prerequisite: Minimum standard - No fossil fuels on-site No fossil fuels will be used by the building in operation.
1	Predictive energy modelling process	5	0	5	Predictive energy modelling process (5 credits) Targeted – No (potential) <i>One credit – Energy strategy</i> Completed BEFORE the end of RIBA Stage 2 Define an energy strategy for the building at the concept design stage that describes qualitatively how the operational energy and carbon performance of the building will be minimised. <i>Three credits – Predictive energy modelling</i> Completed BEFORE the end of RIBA Stage 4 Estimate unregulated energy uses and occupancy patterns for the building:

Credit	Available	Targeted	Potential	Comments
				Significant energy end uses that will be present in the building must be identified. As a minimum the following end uses should be considered: a. Energy use for lighting not covered by building regulations b. Energy use for lifts and escalators c. Energy use for small power d. Energy use for catering e. Energy use for server rooms f. Energy use for domestic hot water g. Energy use for any other types of unregulated plant and equipment – e.g., commercial refrigeration, medical equipment etc. h. Energy use for industrial process load Construct a detailed energy model during the technical design stage and undertake sensitivity analysis and scenario modelling to explore the impact of key parameters and assumptions on energy consumption: The following operational assumptions should be considered when selecting input variables for the sensitivity analysis: a. The efficiency of major energy consuming components b. Alternative system configurations and control strategies c. Occupancy density and hours of use d. Management and occupant behaviour e. Current and future weather scenarios The results of the sensitivity analysis should be used to inform the development of scenarios that reflect the likely energy performance range for the building. The scenarios must include: a. A central case scenario which represents the most reasonable assumptions about occupancy, fabric and building system efficiencies and control strategies. b. A high energy consumption scenario based on uncertainties relating to key input parameters which result in higher energy consumption. c. A low energy consumption scenario based on uncertainties relating to key input parameters which result in lower energy consumption.

Credit	Available	Targeted	Potential	Comments
				Predict annual operational energy consumption in use by fuel type for the building based on the scenario modelling. The modelling must be updated at the post-construction stage to account for any changes to the building specification: The predicted annual operational energy consumption for the building must be based on the scenario modelling results and be higher than that for central case scenario. How high the predicted energy performance should be set above the central case scenario should be informed by the range of the scenario modelling results, the extent to which risks of underperforming in use have been mitigated, and previous experience with other similar projects. An uncertainty margin of 25% over the central case scenario should be used as a default unless a lower modelling margin is recommended by a suitably qualified energy modeller in which case the margin used must be justified in the energy modelling report. An energy modelling report must be produced covering the following: - The approach to modelling the building fabric, HVAC systems, and control strategies - Sources of the information for the assumptions and inputs about occupancy patterns and unregulated energy loads - The levels of uncertainty that can be ascribed to the key assumptions and inputs - The selection of input parameters for the sensitivity analysis and scenario modelling - The energy modelling margin and any justification. <i>One credit – Risk assessment and mitigation</i> Achieve the predictive energy modelling credits. Highlight any significant design, technical, and process risks that might prevent the buildings achieving energy performance target and indicate how these risks will be mitigated throughout the construction and commissioning process.

Credit	Available	Targeted	Potential	Comments
				The risk assessment should consider situations where the design assumptions and operational situation could have a significant negative impact on energy consumption in use. Risks to be considered (where relevant) include: - Product specification and the management of value engineering decisions - Construction quality - System installation considerations, particularly for complex or novel systems - Appropriate commissioning of servicing systems - Ensuring that end users understand how to operate the building as intended. Options for mitigating these risks include: - Product specification and the management of value engineering decisions –Contractual requirements relating to changes to the design specification. - Construction quality – Achieving the Testing and inspecting building fabric credit in Man 04. - System installation considerations, particularly for complex or novel systems – The use of experienced installers and contractors. - Appropriate commissioning of servicing systems – Achieving the Commissioning building services credit in Man 04 and/or the In-use commissioning credit in Man 05. - Ensuring that end users understand how to operate the building as intended – Achieving the Handover credit in Man 04. <u>Comments & Actions</u> - Project Team to deliver an energy strategy for the building. - Project Team to appoint a suitably qualified energy specialist to undertake Predictive Energy modelling in line with CIBSE TM 54. - The energy modelling report must include a risk assessment.

	Credit	Available	Targeted	Potential	Comments
2	Predicted operational energy performance score	7	0	7	Predicted operational energy performance score (7 credits) Minimum Standard to achieve 'Excellent' target rating the Operational Energy Performance score (OEP_{NC}) must be ≥ 0.4286 Targeted – No (potential) Achieve the predictive energy modelling credits. Credits are awarded based on the Operational Energy Performance score for New Construction (OEP_{NC}). <u>Comments & Actions</u> - Project Team and energy specialist to deliver the predictive energy modelling report to determine the credit. - SRE can provide this service for an additional fee, if required.
e1	Disclosing an in-use energy performance target - Exemplary credit	1	0	0	Disclosing an in-use energy performance target - Exemplary credit (1 credit) Completed BEFORE practical completion on site Targeted – No An in-use energy performance target has been disclosed to stakeholders and been made publicly available prior to practical completion. The energy target should be expressed as an annual energy intensity normalised by floor area. The scope of energy uses included in the target must be explicitly stated, for example, whole building or core building services and common areas only. Where a target is set in units other than delivered energy (for example, carbon emissions or primary energy), factors to convert these to delivered energy must be provided. In all cases the floor metric must be defined (for example, GIA or NIA). This information must be made available to building stakeholders (for example, prospective owners and occupiers of the building) and be accessible to members of the public. <u>Comments & Actions</u> This credit is not sought at this stage.

Credit		Available	Targeted	Potential	Comments
e2	Third-party validation of predictive energy modelling - Exemplary credit	1	0	0	Third-party validation of predictive energy modelling - Exemplary credit (1 credit) Targeted – No (Potential) The predicted energy consumption modelling results have undergone third-party validation. The energy prediction model and the predicted operational energy values should be validated by a suitably qualified energy modelling engineer or accredited professional who is not involved with the project team or the client. A validation report must be produced that presents an unbiased analysis of the energy model carried out and recommendations for improving the modelling. The recommendations for improving the modelling must either be implemented, or justification for not implementing recommendations provided. Comments & Actions <i>This credit is not sought at this stage.</i>
e3	Preparing for in-use measurement of energy consumption - Exemplary credit	1	0	0	Achieve maximum available credits in Ene 03 Energy monitoring. The energy modelling outputs include a breakdown of the energy use by sub-meter that aligns with the energy monitoring strategy for the building. Comments & Actions[EG3] <i>This credit is not sought at this stage.</i>
e4	Commitment to measure energy consumption in-use - Exemplary credit	1	0	0	The client or building occupier commits funds to pay for the in-use energy consumption to be measured by a suitably qualified energy assessor once the building reaches the occupancy threshold. The funding for in-use energy consumption measurement must be sufficient to cover monitoring of energy consumption for the first 12 months of normal occupancy ($\geq 80\%$ full occupancy) for all relevant end uses and compare these to the predicted energy consumption and any energy targets set for the building[EG4].

Credit	Available	Targeted	Potential	Comments
				This could be demonstrated by undertaking a BREEAM In-Use assessment of operational energy or for office buildings in the UK, NABERS UK Energy for Offices. Where the building will be sold or let a green lease agreement must include clauses that guarantee access to energy consumption data once the building is occupied. <u>Comments & Actions</u> <i>This credit is not sought at this stage.</i>
Ene 03 - Energy monitoring				
1	Energy monitoring by end-use	1	1	Energy monitoring by end-use (1 credit) Minimum standard to achieve 'Very Good' target rating Targeted – Yes Identify the energy sources that will be used by the building and estimate the annual energy consumption for the following: a. Grid supply electricity b. Grid supply gas c. District heating d. District cooling e. Renewable electricity generated on-site. Energy monitoring is installed that allows 90% of the estimated annual energy consumption for each energy source to be assigned to an end-use category. As a minimum the following end-uses must be considered, where present: a. Space heating and cooling generators b. Hot water generator c. Fans for mechanical ventilation, space heating or cooling d. Pumps for distribution heating or cooling e. Commercial scale refrigeration or cold storage f. Internal lighting g. External lighting h. Controls and telecommunications i. IT equipment and small plug-in loads j. Internal transport (lifts and escalators)

Credit	Available	Targeted	Potential	Comments	
				Renewable electricity generated on-site and exported from the building must be separately monitored. There is an energy metering system appropriate for the size of the building: a. For buildings with a gross internal area >1000 m², the energy meters are connected to an energy monitoring and management system. b. For buildings with a gross internal area < 1000 m², the energy meters are either: i. Connected to an appropriate energy monitoring and management system. OR ii. Are accessible meters with pulsed outputs or other open protocol communication outputs. Those responsible for monitoring the buildings energy consumption can clearly identify the end-use category covered by each meter. <u>Comments & Actions</u> • MEP to confirm that energy metering systems will be specified and installed in line with the above requirements and that an appropriated energy monitoring and management system will be installed. • MEP to deliver the specification for the energy monitoring system and/or meters.	
2	Energy monitoring for different occupiers and functional areas	1	0	1	Energy monitoring for different occupiers and functional areas (1 credit) Targeted – Yes Energy monitoring is installed that allows energy consumption to be assigned to separately tenanted or occupied areas and to relevant functional areas within the building. Identify units or areas in the building with different tenants or occupiers, OR, where the building is designed for a single occupancy, different functional areas. Devise an energy metering strategy that ensures that different occupants or functional areas are separately monitored where it is technically feasible and cost effective to do so.

Credit	Available	Targeted	Potential	Comments
				For this issue metering is considered cost effective where the cost of installing a sub-meter is lower than the energy cost savings arising from improved energy management over the expected lifetime of the building. There is an energy metering system appropriate for the size of the building: - For buildings with a gross internal area > 1000 m², the energy meters must be connected to an energy monitoring and management system. - For buildings with a gross internal area < 1000 m², the energy meters are either: - Connected to an appropriate energy monitoring and management system. OR - Are accessible meters with pulsed outputs or other open protocol communication outputs. Those responsible for monitoring the buildings energy consumption can clearly identify the functional or occupier area covered by each meter. <u>Comments & Actions</u> - MEP to confirm that energy metering systems will be specified and installed in line with the above requirements and that an appropriated energy monitoring and management system will be installed. - MEP to deliver the specification for the energy monitoring system and/or meters. - MEP to deliver floor plans showing functional or tenanted areas, where applicable.
Ene 04 - Low carbon design				
1	Building form optimisation	1	0	Building performance optimisation (2 credits) Targeted-No The project team carries out an analysis of the site and proposed development during the Concept Design stage to explore the effect of building form on energy demand. Demonstrate that the analysis has informed the building design and will lead to a reduction in building energy consumption in use.

Credit	Available	Targeted	Potential	Comments	
				<u>Comments & Actions</u> Credit not sought due to orientation of building.	
2	Fabric performance optimisation	2	0	2	Fabric performance optimisation (2 credits) Targeted – No (potential) The project team carries out an analysis of the proposed development to explore the impact of alternative fabric specifications on the building's demand for heating and cooling. One credit: 5% reduction in building energy demand AND implement fabric performance measures which reduce the overall building heating and cooling energy demand by ≥5% compared to minimum values set by building regulations. OR Two credits: 10% reduction in building energy demand AND implement fabric performance measures which reduce the overall building heating and cooling energy demand by ≥10% compared to minimum values set by building regulations (Targeted). OR Two credits: Fabric performance has been optimised. Demonstrate that the fabric specification has minimised the demand for heating and cooling (Targeted). The analysis to reduce energy demand from heating and cooling must consider the following: i. Fabric insulation ii. Thermal mass to store heat or coolth iii. Air tightness iv. Solar gains <u>Comments & Actions</u> - Project Team to confirm they will undertake an analysis of fabric performance. - Energy modelling to demonstrate the reduced energy demand for heating and cooling arising from the proposed development.

Credit	Available	Targeted	Potential	Comments	
3	Low and zero carbon energy generation technologies	2	0	0	Low and zero carbon energy generation technologies (2 credits) Targeted – No – Biomass is not an eligible LDC energy generation <i>One credit – Installation of LDC energy generation technologies</i> One or more eligible LDC energy generation technologies have been installed by competent installers. <i>One credit – Meeting LDC energy generation targets</i> Achieve the Installation of LDC energy generation technologies credit. The energy generated by the installed LDC energy generation technologies meet the following targets: a. Where photovoltaic (PV) panels are the only LDC energy generation technology installed, the electricity generated must: i. Be equal to, or exceed, that generated by reference PV panels covering 50% of the ground floor area. - OR ii. Account for ≥ 60% of the buildings annual electricity consumption. b. Where only LDC energy generation technologies other than PV panels are installed, the energy generated must: i. Be equal to, or exceed, 137 kWh/year/m² of ground floor area. - OR ii. Meet ≥ 60% of the buildings annual demand for the relevant energy source. c. Where the installed LDC energy generation technologies include both PV panels and other LDC energy generation technologies, selected generation targets as listed in 11.a and 11.b should be used in conjunction scaled proportionally to the amount of electricity generated by each technology.

Credit		Available	Targeted	Potential	Comments
					<u>Comments & Actions</u> - SRE can provide this study for an additional fee. - Drawings and technical specifications of LZC technologies proposed for the development required.
Ene 05 - Energy efficient equipment					
1	Energy efficient equipment	0	0	0	Items[EG5] of equipment included in the project specification are considered to be in-scope unless one or more of the following conditions apply: They are part of an industrial process. This credit only applies to unregulated energy equipment. It is assumed there is none in this development. <u>Comments & Actions</u> <i>Credit not applicable – it is assumed there is no equipment in scope apart from equipment used for industrial uses.</i>
Ene 06- Energy efficient systems					
1	Energy efficient systems	0	0	0	<u>Credit not applicable – it is assumed there are no systems in scope apart from systems used for industrial uses.</u> Energy efficient systems Targeted – Not in scope[EG6] Identify in-scope systems of unregulated energy demand. i.e. Building energy consumption resulting from building services and fittings that are not generally covered by building regulations and are not included in the scope of the Ene 01 assessments, unless one of the following apply: - They are part of an industrial process. - They provide temporary services e.g., external lighting for theatrical, stage, and local display installations. - They are only used when maintenance work is being carried out. - They are only used in an emergency.

Credit	Available	Targeted	Potential	Comments																						
				5. There are overriding safety, security or accessibility requirements that prevent energy efficiency criteria being met by any relevant compliance routes. 6. Existing systems are used in place of new systems (due to the reduction in embodied carbon). Estimate the expected annual energy consumption by in-scope systems. Some include: a. External lighting (Assumed) b. Cold storage c. Lifts and escalators (Assumed) d. Swimming pools e. Commercial laundries f. Cooling systems in server rooms Determine the number of credits available using Table 6.7: <table><tr><th>In-scope unregulated energy using systems / regulated energy use (%)</th><th>Credits available</th></tr><tr><td>No in-scope equipment OR Energy consumption of in-scope equipment is not significant</td><td>Issue filtered out</td></tr><tr><td>< 10%</td><td>1</td></tr><tr><td>≥ 10% - 20%</td><td>2</td></tr><tr><td>≥ 20% - 30%</td><td>3</td></tr><tr><td>≥ 30% - 40%</td><td>4</td></tr><tr><td>≥ 40% - 50%</td><td>5</td></tr><tr><td>≥ 50% - 60%</td><td>6</td></tr><tr><td>≥ 60% - 70%</td><td>7</td></tr><tr><td>≥ 70% - 80%</td><td>8</td></tr><tr><td>≥ 80%</td><td>9</td></tr></table> Determine in-scope systems that are energy efficient by one of the following: a. Where the system is more energy efficient than that of a standard version of the system b. Where the systems meet specific “deemed to comply” energy efficiency requirements OPTION A: Exceeding the standard version	In-scope unregulated energy using systems / regulated energy use (%)	Credits available	No in-scope equipment OR Energy consumption of in-scope equipment is not significant	Issue filtered out	< 10%	1	≥ 10% - 20%	2	≥ 20% - 30%	3	≥ 30% - 40%	4	≥ 40% - 50%	5	≥ 50% - 60%	6	≥ 60% - 70%	7	≥ 70% - 80%	8	≥ 80%	9
In-scope unregulated energy using systems / regulated energy use (%)	Credits available																									
No in-scope equipment OR Energy consumption of in-scope equipment is not significant	Issue filtered out																									
< 10%	1																									
≥ 10% - 20%	2																									
≥ 20% - 30%	3																									
≥ 30% - 40%	4																									
≥ 40% - 50%	5																									
≥ 50% - 60%	6																									
≥ 60% - 70%	7																									
≥ 70% - 80%	8																									
≥ 80%	9																									

Credit		Available	Targeted	Potential	Comments
					You must demonstrate that the energy performance of the actual system achieves a meaningful reduction in energy consumption compared to a standard version. A standard system is defined as being a system that: 1. Has energy using components with energy efficiency levels that are typical for the component types. 2. Has not been designed to optimise energy consumption. 3. Has only energy efficient features and controls that are typical for the system type <u>OPTION B: “Deemed to comply”</u> This is an alternative compliance route that is available for the following types of system: g. External lighting (Assumed) h. Cold storage i. Lifts and escalators (Assumed) j. Swimming pools k. Commercial laundries l. Cooling systems in server rooms Deemed to comply requirements: <i>External lighting</i> 1. The average initial luminous efficacy across all in-scope external lighting systems within the construction zone achieves ≥ 70 luminaire lumens per circuit watt. 2. All external light fittings are automatically controlled to prevent operation during daylight hours and are fitted with presence detection in areas of intermittent pedestrian traffic <u>Comments & Actions</u> • <i>Project Team to confirm that a meaningful reduction in energy reduction will be demonstrated for all relevant energy efficient systems on site.</i>
Ene 07- Flexible demand response					
1	Flexible demand response	1	0	0	Flexible demand response Targeted – No (potential)

Credit		Available	Targeted	Potential	Comments
					Where the following systems are present, they must meet the associated criteria: - Electric space heating - Operation can be optimised based on signals from the electricity supplier or local renewable sources. - Electric space cooling - Operation can be optimised based on signals from the electricity supplier or local renewable sources. - Electric domestic hot water - Operation can be optimised based on signals from the electricity supplier or local renewable sources. - Other systems or equipment with flexible demand capability - The battery energy storage system is capable of charging based on signals from the electricity supplier or local renewable sources (1 point), The battery energy storage system is capable of feeding electricity back into the grid (1 point). <u>Comments & Actions</u> <i>This credit is not sought at this stage.</i>
Ene 08 - Installed controls					
1	Installed controls	2	1	0	Installed controls (2 credits) Targeted – Yes (1 credit) Determine the number of installed controls points available based on the installed HVAC services and relevant system details. Determine the number of installed controls points achieved based on the functionality of the controls. The number of credits awarded is determined by the proportion of available installed controls points that are achieved. One credit strategy: 40-55% available points <i>Space Heating (Air system)</i> - Room / Zone Level Temperature Control - Heating output controlled at room/zone level. - Variable Speed Fans - Variable speed control of fans - Outside Temperature Sensor – Weather compensation <i>Space Cooling (Air conditioning / Comfort cooling)</i>

Credit		Available	Targeted	Potential	Comments
					- Room / Zone Level Cooling Control - Cooling output controlled at room/zone level - Variable Control Cooling Plant - Inverter / variable capacity compressors - Variable Speed Fans - Cooling distribution airflow modulation <i>Mechanical Ventilation</i> - Central Air Quality Sensors (CO₂) - Ventilation controlled centrally based on IAQ - Multistage AHU Control – Basic staged control - Heat Recovery (Sensor Controlled) - Heat recovery linked to exhaust sensors <u>Comments & Actions</u> • Project Team and MEP to confirm the specification for HVAC systems and controls will support the available points required for 1 credit. • Relevant contracts and drawings will be provided in support.
		31	7	17	Standard Energy Credit Total
		7	0	0	Exemplary Energy Credit Total
		23.43	3.71	9.01	% Energy Total (Standard + Exemplary)
Transport (0.71 % per Credit)					
Tra 01 - Transport assessment and travel plan					
1	Transport assessment and travel plan	2	2	0	Transport assessment and travel plan (2 credits) Completed BEFORE end of RIBA Stage 2 Targeted – Yes Conduct a site-specific transport assessment by the end of the Concept Design stage. Develop a site-specific travel plan following the transport assessment recommendations by the end of the Concept Design stage. Demonstrate that the travel plan can guide the appropriate implementation of sustainable transport measures during the design, construction, and occupancy stages and be supported by the building's management during operation. <u>Comments & Actions</u>

Credit	Available	Targeted	Potential	Comments	
				Project Team to confirm Transport Assessment and Travel Plan will be provided before the end of Concept Design.	
Tra 02 - Sustainable transport measures					
Pre-req	Prerequisite Transport assessment and travel plan	✓	✓	Prerequisite: Transport assessment and travel plan Complete a transport assessment and travel plan in line with Tra 01. If these documents are completed after Concept Design, they can still be used to meet this prerequisite.	
1	Transport options implementation	10	0	2	Transport options implementation (10 credits) Targeted – No (Potential - 2 credits) Building type: Building type A Credits are awarded based upon the site's Accessibility Index (AI) and the implementation of any of the following: - The existing PTAI calculated is ≥ 8 for all other building types (Assumed). - Improve the existing PTAI by at least 1.00 (Potential). - Provide up-to-date local public transport information in a convenient, accessible area to help building users plan journeys by public transport (Assumed). - Provide electric vehicle charging infrastructure 1 Point: 10% parking spaces are fitted with ≥ 7 kW EV charging points AND 20% parking spaces have necessary infrastructure for future demand 2 Points: Requirements for 1 Point are met AND, EITHER EV charging score of ≥ 20 is achieved, OR $\geq 30\%$ of parking spaces must be active EV charging (each with a charging point ≥ 7 kW) - Car sharing: - Set up a car sharing group or facility to promote car sharing among building users. - Actively market the car sharing scheme and provide communication channels that make it easy to join and use.

Credit	Available	Targeted	Potential	Comments
				c. Provide priority spaces for car sharers, allocating $\geq 5\%$ of the total staff car parking capacity. d. Ensure that car share spaces are placed near the building entrance as the requirements of other types of priority parking (disabled, etc.) allow. 6. Pedestrian/cycle route improvements: a. Engage with the local authority at the earliest (brief) stage to review public cycle and pedestrian routes. b. Agree on possible improvements to the local active travel network that supplement existing plans and are relevant to the site/project. c. Select at least one such improvement and carry it out. 7. POTENTIAL: Install at least the minimum number of cycle storage spaces. 8. POTENTIAL: Having supplied cycle storage space as per Option 7 above, provide building users with at least two of the following facilities: a. Showers b. Changing facilities c. Lockers d. Drying spaces <i>(Where facilities are combined – e.g. showers and changing facilities – it must be possible for different people to use them at the same time if they are to count as more than one facility).</i> 9. Existing amenities - Ensure at least three relevant amenity types within less than or equal to 500 m of proximity. 10. New or enhanced amenities - Provide relevant and accessible new amenities within $\leq 500\text{m}$ of the building entrance. These can be an enhanced existing amenity, or a new type of amenity. a. 2 Points: at least one new or enhanced amenity type. b. 3 Points: Two or more new or enhanced amenities type. 11. Carry out one site-specific improvement measure in line with the travel plan not listed as an option in Tra 02. Submit this for BRE review. <u>Comments & Actions</u> <i>We have assumed cycle storage and cycle facilities will be available as part of the wider site. Therefore 2 credits have been targeted.</i>
	12	2	2	Standard Transport Credit Total
	0	0	0	Exemplary Transport Credit Total
	8.52	1.42	1.42	% Transport Total (Standard + Exemplary)

Credit		Available	Targeted	Potential	Comments																								
Water (0.83 % per Credit)																													
Wat 01 - Water consumption																													
1	Water consumption	5	3	0	Water consumption (5 credits) Targeted – Yes (3 credits) This issue assesses the efficiency of the domestic water-consuming components specified for the development. Determine the water efficiency of all in-scope water-consuming components. Determine the amount of recycled water expected from approved blackwater, greywater, and rainwater systems. The number of credits awarded is determined by the percentage improvement in potable water use in litres per person per day for the actual building compared to that of a baseline building. Information on the types of water-using components present in the building, and the number of each type of water-using component should be provided by the project team. For this assessment, it is assumed a ≥ 45% improvement over baseline is achievable. Table 8.3: Baseline performance levels for water-consuming components <table><tr><th>Water consuming component</th><th>Baseline performance level</th></tr><tr><td>WCs/toilet</td><td>6.0 litres effective flush volume</td></tr><tr><td>Urinal</td><td>8.75 litres/bowl/hour</td></tr><tr><td>Washbasin taps</td><td>10 litres/minute</td></tr><tr><td>Shower</td><td>12 litres/minute</td></tr><tr><td>Kitchen tap</td><td>10 litres/minute</td></tr><tr><td>Bath</td><td>200 litres</td></tr><tr><td>Dishwasher – Domestic sized</td><td>17 litres/cycle</td></tr><tr><td>Dishwasher – Commercial sized</td><td>8 litres/rack</td></tr><tr><td>Washing machine – Domestic sized</td><td>90 litres/use</td></tr><tr><td>Washing machine – Commercial sized</td><td>14 litres/kg</td></tr><tr><td>Waste disposal unit</td><td>17 litres/minute</td></tr></table> Comments & Actions	Water consuming component	Baseline performance level	WCs/toilet	6.0 litres effective flush volume	Urinal	8.75 litres/bowl/hour	Washbasin taps	10 litres/minute	Shower	12 litres/minute	Kitchen tap	10 litres/minute	Bath	200 litres	Dishwasher – Domestic sized	17 litres/cycle	Dishwasher – Commercial sized	8 litres/rack	Washing machine – Domestic sized	90 litres/use	Washing machine – Commercial sized	14 litres/kg	Waste disposal unit	17 litres/minute
Water consuming component	Baseline performance level																												
WCs/toilet	6.0 litres effective flush volume																												
Urinal	8.75 litres/bowl/hour																												
Washbasin taps	10 litres/minute																												
Shower	12 litres/minute																												
Kitchen tap	10 litres/minute																												
Bath	200 litres																												
Dishwasher – Domestic sized	17 litres/cycle																												
Dishwasher – Commercial sized	8 litres/rack																												
Washing machine – Domestic sized	90 litres/use																												
Washing machine – Commercial sized	14 litres/kg																												
Waste disposal unit	17 litres/minute																												

Credit		Available	Targeted	Potential	Comments
					- MEP to confirm domestic sanitaryware proposed and deliver specifications in line with the below recommendations. - Assessor must be informed if water fittings quantity and/or flow rate will change. Consider the following performance levels when proposing Sanitaryware: - WCs/toilet ~ $\leq 4.5/3$ L dual flush capacity - Urinals ~ $\leq$ N/a - Washbasin taps ~ ≤ 5.0 L - Showers ~ $\leq$ N/a - Kitchen tap (kitchenette) ~ N/a
e1	Water consumption - Exemplary credit	0	0	0	Comments & Actions Credit not targeted.
Wat 02 - Water monitoring					
Pre-req	Prerequisite - Water monitoring	✓	✓		Prerequisite - Water monitoring Minimum Standard to achieve 'Good' target rating A water meter with a pulsed or other open protocol output is installed on all potable water supplies entering the building.
1	Water monitoring	1	1	0	Water monitoring (1 credit) Minimum Standard to achieve 'Good' target rating Targeted – Yes A water meter with a pulsed or other open protocol output is installed on all potable water supplies entering the building. Water-consuming plant or building areas with significant water demand must be fitted with easily accessible sub-meters or have water monitoring equipment that is integral to the plant or area. A water monitoring system that is appropriate for the size of the building has been installed in accordance with the below:

Credit		Available	Targeted	Potential	Comments
					a. For buildings with a gross internal area $\geq 1000 \text{ m}^2$, the water meters are connected to a monitoring and management system. b. For buildings with a gross internal area $< 1000 \text{ m}^2$, the water meters are either: - Connected to an appropriate water monitoring and management system. - Accessible meters with pulsed outputs or other open protocol communication outputs Appropriate labelling is used to clearly identify the water uses and areas covered by each meter. Comments & Actions - MEP to confirm that water meters will be specified in line with the above requirements. <i>Water uses deemed to be significant and to be fitted with a sub-meter:</i> - Common areas (e.g., covering the supply to toilet blocks). - Service areas (covering the supply to outlets within storage, delivery, waste disposal areas etc.). - Ancillary or separate buildings to the main development with a water supply. - All water consuming systems or building areas that are expected to account for more than 10% of the buildings total water demand must be considered when determining significant water uses. <i>It is not recommended to install a sub-meter in the following cases:</i> - Where a building has only one or two small sources of water demand (e.g. an office with sanitary fittings and a small kitchen). - Where the building has two sources of water demand, one significantly larger than the other, and the water consumption for the larger demand is likely to mask the smaller demand.
Wat 03 - Water leak detection and prevention					
1	Leak detection system	1	1	0	Leak detection system Credit not applicable – as there are no in-scope water uses

Credit	Available	Targeted	Potential	Comments
				Targeted – Yes Install a leak detection system capable of detecting a major water leak: a. On the utilities' water supply within the building, to detect any major leaks within the building. AND b. Between the building and the utilities' water supply, to detect any major leaks between the utilities' supply and the building under assessment. The leak detection must be either: a. A permanent automated water leak detection system that alerts the building occupants to any leaks. OR b. An inbuilt automated diagnostic procedure for detecting leaks. <u>Comments & Actions</u> • <i>MEP to confirm that a leak detection system will be installed in line with the above requirements.</i>
2	Flow control devices	1	1	Flow control devices (1 credit) Targeted – Yes Flow control devices that regulate the supply of water to each WC area or facility according to demand are installed. The following types of flow devices meet the criteria: a. A time controller, i.e. an automatic time switch device to switch off the water supply after a predetermined interval. b. A programmed time controller, i.e. an automatic time switch device to switch water on or off at predetermined times. c. A volume controller, i.e. an automatic control device to turn off the water supply once the maximum pre-set volume is reached. d. A presence detector and controller, i.e. an automatic device that switches water on and off, depending on the detection of occupancy or movement.

Credit	Available	Targeted	Potential	Comments	
				e. A central control unit, i.e. a dedicated computer-based control unit for the overall management of a water control system, utilising some or all the types of control elements listed above. <u>Comments & Actions</u> MEP to confirm whether flow control devices will be specified for each WC area, in line with the above.	
Wat 04 – Water efficient equipment and systems					
1	Water efficient equipment and systems	0	0	0	<u>Comments & Actions</u> Credit not applicable – as there is no in-scope water uses
Wat 05 - Prediction of operational water consumption					
1	Predict operational water consumption	1	0	1	Predict operational water consumption (1 credit) Targeted – No (potential) Estimate the annual operational water consumption for the building. This includes both sanitary and non-sanitary water uses. Calculations should be carried out to confirm the overall estimated annual operational water consumption for the building and water-using components and equipment as identified by the BRE are required. <u>Comments & Actions</u> This credit is not targeted.
e1	Disclosing an in-use water performance target and commitment to measure water consumption in-use - Exemplary credit	1	0	0	Predict operational water consumption (1 credit) Targeted- No Achieve the credit for predicting operational water consumption above and achieve the maximum available credits in Wat 02 Water monitoring. An in-use water performance target has been disclosed to stakeholders and been made publicly available prior to practical completion.

Credit		Available	Targeted	Potential	Comments
					The client or building occupier commits funds to pay for in-use water consumption measurement and reporting once the building is occupied. This requires a suitably qualified individual or organisation to be appointed and to measure and report on the actual in-use operational consumption. <u>Comments & Actions</u> <i>This credit is not targeted.</i>
		9	6	1	Standard Water Credit Total
		2	0	0	Exemplary Water Credit Total
		9.47	4.98	0.83	% Water Total (Standard + Exemplary)
Materials (1.14 % per Credit)					
Mat 01 - Building life cycle assessment					
1	Early design LCA and embodied carbon reporting	2	2	0	Early design LCA and embodied carbon reporting (2 credits) Minimum Standard to achieve 'Excellent' target rating an LCA and embodied carbon reporting must be produced at ANY project stage Completed BEFORE end of RIBA Stage 2 Targeted – Yes Carry out an early design phase LCA calculation from the materials that the project incorporates into the building. The LCA must: a. Meet the requirements for tools and scope: i. Use an LCA tool recognised by BREEAM. ii. Early stage reporting (Concept Design) must be delivered no later than 20 working days after submitting for planning application. iii. Results must be submitted for all core environmental impact indicators. iv. The following life cycle modules must be covered (based on EN 15978): a. Modules A1–A5: Product sourcing and construction stage. b. Modules B1–B5: Use stage (excluding B6–7). c. Modules C1–C4: End-of-life stage. d. Module D: Considering benefits and loads beyond the system boundary. This is required unless EN 15804-A2 EPD data is not available for used products.

Credit	Available	Targeted	Potential	Comments	
				v. All building elements must align with RICS Whole Life Carbon Assessment Standard, 2nd Edition. b. Include relevant options appraisals, including a baseline assessment. There are no requirements to carry out a specific number of options appraisals for the project. c. Be used as a basis for choosing design solutions and materials with the aim of achieving a low environmental impact. If an alternative solution with a lower environmental impact has not been chosen, then this must be justified. From the early design LCA results, report the embodied carbon emissions from materials used in the building. Comments & Actions SRE can provide this service for an additional fee.	
2	Technical design LCA and embodied carbon reporting	1	1	0	Technical design LCA and embodied carbon reporting (1 credit) Completed BEFORE end of RIBA Stage 4 Targeted – Yes Carry out a technical design phase LCA calculation from the materials that the project incorporates into the building. The LCA must: a. Meet the requirements for tools and scope as stated above. b. Include at least one assessment showing the evolving design and specification at technical design. From the technical design LCA results, report the embodied carbon emissions from materials used in the building. Comments & Actions Client/developer to appoint a suitable project team member to undertake an LCA for the Proposed Development during Technical Design. SRE can provide this service for an additional fee.
3	Post-construction LCA and embodied carbon reporting	2	2	0	Post-construction LCA and embodied carbon reporting (2 credits) Targeted – Yes Carry out a post-construction phase LCA calculation from the materials that the project incorporates into the building. The LCA must:

Credit	Available	Targeted	Potential	Comments	
				a. Meet the requirements for tools and scope as stated above. b. Include as-built specification at post-construction. From the post-construction LCA results, report the embodied carbon emissions from materials used in the building. <u>Comments & Actions</u> - Client/developer to appoint a suitable project team member to undertake an LCA for the Proposed Development at Post-Construction. - SRE can provide this service for an additional fee.	
4	Embodied carbon benchmark comparison	2	0	2	<u>Comments & Actions</u> - Credit not sought – potential depending on the LCA results where available - Client/developer to appoint a suitable project team member to undertake an LCA at Technical Design AND Post-Construction, which confirms the embodied carbon benchmark band of >C.
e1	Embodied carbon benchmark comparison - Exemplary credit	2	0	0	<u>Comments & Actions</u> This credit is not sought due to high benchmarks.
e2	Third party verification - Exemplary credit	1	0	0	Third party verification - Exemplary credit (1 credit) Targeted – Yes A suitably qualified third party verifies the building LCA work. The suitably qualified third party must: 1. Produce a report describing how they have checked that the building LCA work accurately represents the designs under consideration during the: a. Early design phase, and b. Technical design phase, and c. Post-construction phase (only relevant if criteria for Post-construction LCA and embodied carbon reporting has been met) 2. Itemise in the report the checks made for each LCA option.

Credit		Available	Targeted	Potential	Comments
					3. Include in the report details of their relevant skills and experience and a declaration of their third-party independence from the project client and design team. <u>Comments & Actions</u> - Client/developer to appoint third party to verify LCA for Concept and Technical Design data. - Client/developer to commit that third-party will be appointed to verify LCA at the Post-Construction stage. - SRE can offer this service for an additional fee, if required
e3	Embodied carbon public data disclosure - Exemplary credit	1	0	0	<u>Comments & Actions</u> This credit is not sought.
Mat 02 - Environmental product declarations					
1	Product specification	1	1	0	Product specification (1 credit) Targeted – Yes Specify construction products with EPDs, for the significant material categories listed below, that achieve a total EPD points score of at least 20. Material categories: - Timber and timber-based products - Concrete or cementitious - Metal - Stone or aggregate - Clay-based - Gypsum - Glass - Plastic, polymer, resin, paint, chemicals, and bituminous - Animal fibre or skin, cellulose fibre - Other The score available for each material category is capped at 4. Therefore, you must present evidence which sufficiently covers as many significant materials as possible.

Credit		Available	Targeted	Potential	Comments
					Comments & Actions <i>This credit is not sought at this stage.</i> <i>Prefer products with verified EPDs. Where these products are specified, copies of their EPD certificates to be provided.</i>
Mat 03 - Responsible sourcing of construction products					
Pre-req	Prerequisite Legally harvested and traded timber	✓	✓		Prerequisite: Legally harvested and traded timber Minimum Standard to achieve ANY target rating 100% of timber and timber-based products used on the project are 'Legal' and 'Sustainable' as per the UK Government's Timber Procurement Policy (TPP).
1	Enabling sustainable procurement	1	1	0	Enabling sustainable procurement (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – Yes A sustainable procurement plan must be used by the design team to guide specification towards sustainable construction products. The plan must: - Be in place before the end of Concept Design. - Include sustainability aims, objectives, and strategic targets to guide procurement activities. Targets do not need to be achieved for the credit to be awarded at post-construction stage but justification must be provided for targets that are not achieved. - Include a requirement for assessing the potential to procure construction products locally. There must be a policy to procure construction products locally where possible. - Include details of procedures in place to check and verify the effective implementation of the sustainable procurement plan. - The documented policy and procedure must be disseminated to all relevant internal and external personnel, and included within the construction contract to ensure that they are enforceable on the assessed project. In addition, if the plan is applied to several sites or adopted at an organisational level it must:

Credit	Available	Targeted	Potential	Comments
				a. Identify the risks and opportunities of procurement against a broad range of social, environmental, and economic issues following the process set out in ISO 20400:2017. <u>Comments & Actions</u> <i>SRE can provide this for an additional fee.</i>
2	Measuring responsible sourcing	3	1	0 Measuring responsible sourcing (3 credits) Targeted – Yes (1 credit) Credits for this issue are awarded based on the proportion of responsible sourcing of materials (RSM) points achieved. To assess this issue there are up to four types of data needed for each product: - Material category - Responsible sourcing certification scheme (RSCS) or environmental management system (EMS) certifications - Product or material quantities (optional, route 2 only). To determine the number of credits that are achieved for responsible sourcing of construction products, the Mat 03 calculator must be completed with all the relevant information. For 1 credit to be awarded, data for building materials must cover the minimum scope level requirements: - Superstructure, AND; - Internal finishes - Substructure and hard landscaping ≥ 10% of available points for RSM must be achieved. Calculation of the above requires completion of the Mat 03 Calculator tool by the BREEAM assessor, based on materials information (including materials schedule, drawings and responsible sourcing certificates) provided by the Project Team (specifically the Main Contractor or Architect).

Credit		Available	Targeted	Potential	Comments
					<u>Comments & Actions</u> Prefer products from verified manufacturers who operate with EMS certification or RSM certificates.
e1	Measuring responsible sourcing - Exemplary credit	1	0	0	<u>Comments & Actions</u> This credit is not sought due to high benchmarks.
Mat 04 - Durability and resilience					
1	Durability and resilience	1	1	0	Durability and resilience (1 credit) Targeted – Yes <i>Protecting vulnerable parts of the building from damage</i> Protection measures are incorporated into the building's design and construction to reduce damage to the building's fabric or materials in case of accidental or malicious damage occurring. These measures must provide protection against: - Negative impacts of high user numbers in relevant areas of the building (e.g. corridors, lifts, stairs, doors etc.). - Damage from any vehicle or trolley movements within 1 metre of the internal building fabric in storage, delivery, corridor and kitchen areas. - External building fabric damage by a vehicle. Protection where parking or manoeuvring areas are within 1 metre of the building façade and where delivery areas or routes are within 2 metres of the façade, i.e. specifying bollards or protection rails. - Potential malicious damage to building materials and finishes, in public and common areas where appropriate. <i>Protecting exposed parts of the building from material degradation</i> Key exposed building elements have been designed and specified to limit long and short term degradation due to environmental factors. This can be demonstrated through one of the following: - The element or product achieving an appropriate quality or durability standard or design guide. Use the BREEAM manual or refer to BS 7543:2015(93) as the default appropriate standard or use relevant equivalent standards.

Credit	Available	Targeted	Potential	Comments
				OR b. A detailed assessment of the element's resilience when exposed to the applicable material degradation and environmental factors. Produce an access to the roof and façade strategy for cost-effective cleaning, replacement and repair in the building's design. Design the roof and façade to prevent water damage, ingress and detrimental ponding. <u>Comments & Actions</u> • <i>Project team to provide design drawings illustrating vulnerable parts of the building.</i> • <i>Architect to prepare drawings/specification confirming the durability measures specified.</i> • <i>Architect to prepare drawings/specification measures in places to limit degradation effects.</i> • <i>Project team/Architect to deliver Roof and façade access strategy and design drawings showing measures to prevent water damage, ingress and ponding.</i> <i>Examples of suitable durability measures:</i> - <i>Bollards, barriers or raised kerbs to delivery and vehicle drop-off areas</i> - <i>Robust external wall construction, up to 2m high</i> - <i>Corridor walls specified to Severe Duty (SD) as per BS 5234-2</i> - <i>Protection rails to walls of corridors</i> - <i>Kick plates or impact protection (e.g. trolleys) on doors</i> - <i>Hard-wearing and easily washable floor finishes in heavily used circulation areas</i> - <i>Door stoppers to prevent door handles damaging walls</i> - <i>Designing out the risk without the need for additional materials specification to protect vulnerable areas.</i> <i>Designing to prevent water damage</i> - <i>Carefully consider the drainage mechanisms of the façade and roof</i> - <i>Prevent staining, detrimental oxidation, ponding, rot, ingress, penetration or any other deleterious effect.</i>

Credit	Available	Targeted	Potential	Comments
Mat 05 - Material efficiency				
1	Material efficiency	1	1	0
				Material efficiency (1 credit) Completed BEFORE end of RIBA Stage 1 and UPDATED at every project stage (RIBA Stage 2, 3, 4, 5 and 6) Targeted – Yes At the Preparation and Brief and Concept Design stages, set targets and report on opportunities and methods to optimise the use of materials. This must be done for each of the following stages: • Preparation and Brief • Concept Design • Developed Design • Technical Design • Construction Develop and record the implementation of material efficiency during: • Developed Design • Technical Design • Construction Report the targets and actual material efficiencies achieved. <u>Comments & Actions</u> • <i>Architect to provide the Material Efficiency report for RIBA stages 1, 2 and 3 and 4. SRE can provide templates and guidance for this report if appointed as the BREEAM AP</i> • <i>Main Contractor to supply the report for RIBA Stage 5 (Construction).</i> <i>Examples of suitable material efficiency design measures can include:</i> - <i>Increasing the utilisation factor of structural members</i> - <i>Designing to standard material dimensions to reduce off-cuts and waste on site</i> - <i>Removing redundant materials from the design</i> - <i>Using materials that can be recycled or reused at the end of their service life</i> - <i>Making use of recycled or reclaimed materials</i> - <i>Designing for deconstruction and material reuse</i> - <i>Using pre-fabricated elements where appropriate to reduce material waste</i>

Credit		Available	Targeted	Potential	Comments
					- Consider using an 'exposed thermal mass' design strategy to reduce finishes - Avoiding over-specification of predicted loads - Using lightweight structural design strategies - Making use of bespoke structural elements where this will reduce overall material use - 'Rationalisation' of structural elements - Optimising the foundation design for embodied environmental impact.
		14	10	2	Standard Materials Credit Total
		4	0	0	Exemplary Materials Credit Total
		19.96	11.40	2.28	% Materials Total (Standard + Exemplary)
Waste (0.78 % per Credit)					
Wst 01 - Construction waste management					
1	Pre-demolition audit	0	0	0	Pre-demolition audit – not applicable Completed BEFORE end of RIBA Stage 2 Targeted – No – not applicable Complete a pre-demolition audit of any existing buildings, structures or hard surfaces being considered for demolition. This must be used to determine whether refurbishment or reuse is feasible and, in the case of demolition, to maximise the recovery of material for subsequent high grade or value applications. The audit must cover the content of M1: Pre- demolition audit scope on the next page and: - Be carried out at Concept Design stage by a competent person prior to strip-out or demolition works - Guide the design, consider materials for reuse and set targets for waste management - Engage all contractors in the process of maximising high-grade reuse and recycling opportunities Make reference to the audit in the resource management plan (RMP). Compare actual waste arisings and waste management routes used with those forecast and investigate significant deviations from planned targets. <u>Comments & Actions</u>

Credit	Available	Targeted	Potential	Comments				
				Produce a pre-demolition audit compliant with the criteria[EG7].				
2	Construction resource efficiency	3	3	0	Construction resource efficiency (3 credits) Targeted – Yes Prepare a compliant Resource Management Plan (RMP) covering: - Non-hazardous waste materials (from on-site construction and dedicated off-site manufacture or fabrication), including demolition and excavation waste. - Accurate data records on waste arisings and waste management routes. Meet or improve upon the benchmarks below: - One credit awarded where the amount of waste generated per 100m² is ≤13.3 (m³) or ≤11.1 (tonnes) - Two credits awarded where the amount of waste generated per 100m² is ≤7.5 (m³) or ≤6.5 (tonnes) Three credits awarded where the amount of waste generated per 100m² is ≤3.4 (m³) or ≤3.2 (tonnes) – Targeted - Exemplary level awarded where the amount of waste generated per 100m² is ≤1.6 (m³) or ≤1.9 (tonnes) <u>Comments & Actions</u> - Client/developer to appoint and deliver compliant resource management plan. Where the main contractor is not yet appointed, letter of commitment may be used to award the credits.			
3	Diversion from landfill	1	1	0	Diversion from landfill (1 credit) Targeted – Yes Meet, where applicable, the diversion from landfill benchmarks in Table 10.2 for non-hazardous construction waste and demolition and excavation waste generated. Table 10.2: Diversion from landfill benchmarks <table><tr><th>BREEAM Credits</th><th>Type of waste</th><th>Amount of waste diverted from landfill</th></tr></table>	BREEAM Credits	Type of waste	Amount of waste diverted from landfill
BREEAM Credits	Type of waste	Amount of waste diverted from landfill						

Credit		Available	Targeted	Potential	Comments																				
					<table><tr><td rowspan="3">One credit</td><td>Construction</td><td>70%</td><td>80%</td></tr><tr><td>Demolition</td><td>80%</td><td>90%</td></tr><tr><td>Excavation</td><td>N/A</td><td>N/A</td></tr><tr><td rowspan="3">Exemplary level</td><td>Construction</td><td>85%</td><td>90%</td></tr><tr><td>Demolition</td><td>85%</td><td>95%</td></tr><tr><td>Excavation</td><td>95%</td><td>95%</td></tr></table> Sort waste materials into separate key waste groups, either on-site or through a licensed contractor for recovery. Comments & Actions - Client/developer to appoint and deliver compliant resource management plan, including the relevant commitments/targets to divert waste from landfill. Where the main contractor is not yet appointed, letter of commitment may be used to award the credits. - Ensure procedures in place for sorting construction waste into key waste groups.	One credit	Construction	70%	80%	Demolition	80%	90%	Excavation	N/A	N/A	Exemplary level	Construction	85%	90%	Demolition	85%	95%	Excavation	95%	95%
One credit	Construction	70%	80%																						
	Demolition	80%	90%																						
	Excavation	N/A	N/A																						
Exemplary level	Construction	85%	90%																						
	Demolition	85%	95%																						
	Excavation	95%	95%																						
e1	Construction waste management - Exemplary credit	1	0	0	Comments & Actions This credit is not sought at this stage due to high benchmarks.																				
Wst 02 - Use of recycled and sustainably sourced aggregates																									
1	Project sustainable aggregate points	1	0	0	Comments & Actions This credit is not sought due to high benchmarks.																				
e1	Project sustainable aggregate points - Exemplary credit	1	0	0	Comments & Actions This credit is not sought due to high benchmarks.																				
Wst 03 - Operational waste																									
1	Operational waste	1	1	0	Operational waste (1 credit) Targeted – Yes																				

Credit	Available	Targeted	Potential	Comments
				Provide a dedicated space, identified by clear signage, for the segregation and storage of operational recyclable waste. The space is: a. Clearly labelled for long-term durability, to assist with segregation, storage and collection of the recyclable waste streams. b. Accessible to building occupants or facilities operators for the deposit of materials and collections by waste management contractors. c. Of a capacity appropriate to the building type, size, number of units (if relevant) and predicted volumes of waste that will arise from daily or weekly operational activities and occupancy rates Determining the capacity appropriate to the building type & size: Buildings < 5000 m²(Assumed) - At least 2 m² per 1000 m² of net floor area OR - 4 m² per 1000 m² of net floor area where commercial-scale catering is provided Buildings ≥ 5000 m² - A minimum of total of 10 m² OR - 20 m² where commercial-scale catering is provided Note: The net floor area should be rounded up to the nearest 1000 m². For consistent and large amounts of operational waste generated, provide: a. Static waste compactors or balers; situated in a service area or dedicated waste management space. b. Vessels for composting suitable organic waste OR adequate spaces for storing segregated food waste and compostable organic material for collection and delivery to an alternative composting facility. c. A water outlet provided adjacent to or within the facility for cleaning and hygiene purposes where organic waste is to be stored or composted on site.

Credit	Available	Targeted	Potential	Comments	
				<u>Comments & Actions</u> • At least 2m² of refuse space per 1000m² should be provided given the development's GIA = < 5000m². • Project Team to confirm waste refuse store adequate for the size of the development will be provided. • Design drawings to show that this has been incorporated into the Proposed Development are required. • Facilities within the existing building can be used to assess compliance. These facilities must cater for the total volume of predicted recyclable waste arising from the new extension and existing buildings.	
Wst 04 – Speculative finishes (offices)					
1	Speculative finishes	0	0	<u>Comments & Actions</u> Credit not applicable as there are no office areas[EG8]	
Wst 05 - Adapting to climate change					
1	Resilience of structure, fabric, building services and renewables installation	1	1	0	Resilience of structure, fabric, building services and renewables installation (1 credit) Completed BEFORE end of RIBA Stage 2 and provide an update BEFORE end of RIBA Stage 4 Targeted – Yes Conduct a climate change adaptation strategy appraisal using a systematic risk assessment to identify the impact of expected extreme weather conditions arising from physical climate risks and climate change on the building and vulnerabilities over its projected life cycle. The assessment covers the installation of building services and renewable systems, as well as structural and fabric resilience aspects and includes: a. Hazard identification b. Hazard assessment c. Risk estimation d. Risk evaluation e. Risk management

Credit		Available	Targeted	Potential	Comments
					Develop recommendations or solutions based on the climate change adaptation strategy appraisal, before or during Concept Design, that aim to mitigate the identified impact. Provide an update during Technical Design demonstrating how the recommendations or solutions proposed at Concept Design have been implemented where practical and cost effective. Omissions have been justified in writing by the assessor. <u>Comments & Actions</u> - Project Team/Architect to provide a copy of a compliant climate change adaptation strategy appraisal before the end of Concept Design, AND an update required at Technical Design. All adaptation plans should consider the following impacts of climate change and extreme weather events and describe how the design mitigates against them, where appropriate: - Flooding - Storms (including high winds) - Cold events - Heat waves (including temperature increases) - Drought (including reduced summer rainfall) - Milder winters - Wetter winters (including increased moisture and driving rain) - Warmer summers and increased solar radiation - Temperature variation - Precipitation, e.g. rain and snow - Subsidence or ground movement.
e1	Responding to climate change - Exemplary credit	1	0	0	<u>Comments & Actions</u> This credit is not sought due to high benchmarks.
Wst 06 - Disassembly and adaptability					
1	Design for disassembly and adaptability Recommendations	1	1	0	Design for disassembly and adaptability Recommendations (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – Yes

Credit	Available	Targeted	Potential	Comments
				By the end of Concept Design, conduct a study to explore the disassembly and adaptation potential of different design scenarios. By the end of Concept Design, develop solutions based on the study that allow disassembly and adaptability. <i>Adaptability principles:</i> 1. Versatility: the ability of spaces to accommodate changes in use with minimal changes to maximise space utilisation. For example, a performance space that can also be used as a meeting or community space. 2. Convertibility: related to versatility, the potential of internal spaces to accommodate more significant changes in use without affecting building structure. For example, changing a cellular office to an open plan office through changing the internal layout and partitions. 3. Expandability: the ability of a design to accommodate a substantial change that supports or facilitates the addition of new space, features, capabilities, and capacities. It involves designing to allow for either vertical or horizontal additions in floor space. <i>Disassembly principles:</i> 1. Ease of access to components and services: it allows for a material, component, or connector of an assembly, especially those with the shortest anticipated life cycle, to be easily approached, with minimal damage to and impact on it and adjacent assemblies. 2. Independence: it allows for parts, components, modules, and systems to be removed or upgraded without affecting the performance of connected or adjacent systems. 3. Avoidance of unnecessary treatments and finishes: choice of finishes can limit the options for reusing or recycling, particularly if potentially hazardous substances are included. To support disassembly, finishes that can prevent components from being re-used or recycled should be avoided. 4. Supporting re-use (circular economy) business models: this principle is concerned with supporting the market for re-used, refurbished, remanufactured, and recycled materials and products now and in the future, in support of circular economy business models. 5. Simplicity: it refers to the quality of an assembly or system that is designed to be straightforward, easy to understand, and meet performance requirements with the least amount of customization.

Credit	Available	Targeted	Potential	Comments	
				6. Standardization: it is concerned with the use of common components, products, or processes to satisfy a multitude of requirements. 7. Safety of disassembly: it is concerned with easy access to accurate information on the original materials and assembly methods used for an asset, together with details of any subsequent major renovation. <u>Comments & Actions</u> • <i>Project Team/Architect to deliver a copy of a compliant disassembly and adaptability study before the end of Concept Design.</i> <i>Examples:</i> - <i>Modular insulated panel systems (dismountable & reusable)</i> - <i>Bolted structural steel frame</i> - <i>Replaceable refrigeration plant & services zones</i> - <i>Durable long-life envelope components</i>	
2	Design for disassembly and adaptability Implementation	1	1	0	Design for disassembly and adaptability Implementation (1 credit) Completed BEFORE end of RIBA Stage 4 Targeted – Yes Achieve criteria for the Design for disassembly and adaptability Recommendations credit as above. During Technical Design, provide an update on the following: a. How the solutions proposed by Concept Design have been implemented where practical and cost effective. Omissions must be clearly justified. b. Changes to the recommendations and solutions during the development of the Technical Design. Produce a building design for disassembly and adaptability manual to communicate the disassembly and adaptability principles and characteristics to prospective owners or building operators. A disassembly and adaptability manual shall be prepared and submitted, including the following information:

Credit		Available	Targeted	Potential	Comments
					a. Design details: Sufficient information shall be generated documenting specific disassembly methods, material composition, recovery methods, and adaptable design features. b. Material constituents and manufacturers: Products and materials should be traceable to a specific manufacturer or supplier, with contact details, such as product manufacturer websites, included in the construction documentation. c. Connection detailing: Connection detailing, especially for reversible connections, should be well documented for the aspect of assembly and disassembly. <u>Comments & Actions</u> - Project Team/Architect to provide an update of a compliant disassembly and adaptability study before the end of Technical Design. - Client/developer to provide letter of commitment confirming that they will produce a building design for disassembly and adaptability manual.
		9	8	0	Standard Waste Credit Total
		3	0	0	Exemplary Waste Credit Total
		10.02	6.24	0	% Waste Total (Standard + Exemplary)
Land Use & Ecology (0.81 % per Credit)					
Lue 01 - Site selection					
1	Previously occupied land	1	0	0	Previously occupied land (1 credit) Targeted – No At least 75% of the proposed development is on previously occupied land. <u>Comments & Actions</u> Project Team to confirm whether the Proposed Development is on ≥75% of previously occupied land.
2	Contaminated land	1	0	0	Contaminated land (1 credit) Targeted – No

Credit		Available	Targeted	Potential	Comments
					A contaminated land professional undertakes a site investigation, risk assessment and appraisal, using ISO 18400 or equivalent, which deems that land within the development footprint to be affected by contamination. This report identifies: - The degree of contamination - The contaminant sources or types - The options for remediating sources of contamination which present an unacceptable risk. The client or principal contractor confirms that a remediation strategy will be implemented, in line with the report. The credit can ONLY be awarded where remediation has taken place to enable development of the site for the assessed building. <u>Comments & Actions</u> <i>Project Team confirmed that a contaminated land professional has undertaken a contaminated land study.</i> <i>To confirm whether land remediation has/will be carried out.</i> <i>Remediation strategy to be provided.</i>
Lue 02 - Ecological risks and opportunities					
1	Survey and evaluation	1	1	0	Survey and evaluation (1 credit) Targeted – Yes Foundation route The site is evaluated using the BREEAM Ecological Risk Evaluation Checklist (Guidance Note 34) confirming that the foundation route can be used. Comprehensive route – Targeted Completed BEFORE end of RIBA Stage 2 (typically Preparation and Brief stage) A suitably qualified ecologist (SQE) carries out a survey and evaluation for the site early enough to influence site preparation works, layout and, where necessary, strategic planning decisions (typically Preparation and Brief stage). The SQEs survey and evaluation determines the sites ecological baseline, including: Current and potential ecological value and condition of the site and related areas within the zone of influence.

Credit	Available	Targeted	Potential	Comments	
				b. Direct and indirect risks to current ecological value from the project. c. Capacity and feasibility for enhancement of the site's ecological value and, where relevant, areas within the zone of influence. Comments & Actions Project Team and Ecologist to provide a copy of the Ecological Survey and Evaluation report.	
2	Determining ecological outcomes	1	1	0	Determining ecological outcomes (1 credit) Completed BEFORE end of RIBA Stage 2 Targeted – Yes Foundation route Achieve the criteria applicable to Foundation route for the Survey and evaluation credit. AND Relevant members of the project team liaise and collaborate, and where appropriate with representative stakeholders early enough to influence key planning decisions, to: a. Identify the optimal ecological outcomes for the site. b. Select measures to meet the optimal ecological outcomes for the site, in line with the mitigation hierarchy for the foundation route: i. Avoidance ii. Protection Comprehensive route (Targeted) Achieve the criteria applicable to Comprehensive route for the Survey and evaluation credit. AND The ecologist collaborates with appropriate project team members (e.g. landscape architect, architect etc.), sharing relevant information and recommendations from the survey and evaluation to influence the project design as well as decisions regarding site preparation and construction works.

Credit		Available	Targeted	Potential	Comments
					The ecologist, with full support from the project team, collaborates with representative stakeholders early enough to influence key planning decisions (typically Concept Design stage). The ecologist identifies the optimal ecological outcomes for the site, and identifies measures to achieve these outcomes in line with: - The collaborations undertaken with the project team and relevant stakeholders. - The mitigation hierarchy for the comprehensive route: - Avoidance - Protection - Reduction or limitation of negative impacts - On-site compensation - Enhancement, considering the capacity and feasibility within the site, or where this is not viable, off-site. <u>Comments & Actions</u> - Ecologist to provide a statement confirming that they collaborated with all the Project Team members and stakeholders necessary to identify and deliver the project's optimal ecological outcomes, no later than Concept Design. - Ecologist's report must identify the optimal ecological outcomes, and measures implemented (in line with the mitigation hierarchy).
e1	Wider site sustainability - Exemplary credit	1	0	0	<u>Comments & Actions</u> This credit is not sought.
Lue 03 - Managing impacts on ecology					
Pre-req	Prerequisite Ecological risks and opportunities	✓	✓		Prerequisite Ecological risks and opportunities

Credit	Available	Targeted	Potential	Comments
				Whether a project is using the foundation route or the comprehensive route, the criteria in Lue 02 for 'Survey and evaluation' and 'Determining ecological outcomes' must have been met to achieve any credits in this issue.
1	Implementation of measures on-site	2	2	Implementation of measures on-site (2 credits) Targeted – Yes Foundation and comprehensive route For both routes, handover between the design and construction teams must be sufficiently structured and thorough to ensure that all planned ecological measures are communicated, understood, and adhered to throughout construction. Comprehensive route (Targeted) For the comprehensive route only, an ecologist will have been in place throughout planning and design. If an Ecological Clerk of Works has been appointed for the construction and handover stages (RIBA Stages 5 and 6), there must be an additional handover between the two ecologists. The measures required to achieve optimal ecological outcomes must be integrated with site preparation and construction processes. These must be measured and monitored throughout construction and handover (RIBA Stages 5 and 6) as follows: a. Foundation route: The contractor must nominate a biodiversity champion with authority to influence site activities and to ensure the necessary measures are implemented. b. Comprehensive route: An Ecological Clerk of Works (ECoW) will have been appointed by the contractor to monitor and advise on the protection of site ecology as agreed. If the ECoW requires the input of an additional ecological specialist at any point (for example, an expert on a particular form of wildlife), the contractor must provide for such services as required. <u>Comments & Actions</u> • <i>Project Team to confirm that an Ecologist has been appointed in the Design phase.</i> • <i>Project Team to provide tender documents incorporating ecological requirements to ensure ecological outcomes and measures required to achieve have been handed over to the demolition/construction team.</i>

Credit		Available	Targeted	Potential	Comments
					- Where a contractor has not yet been appointed at Design, developer to include the appointment of an Ecologist, and the facilitation of handover between Ecologists, in the tender documents. - Ecologist to provide a statement covering: - All measures to achieve optimal ecological outcomes. - How each measure are to be implemented. - What evidence should be provided by the contractor to demonstrate compliance at handover. - The management and monitoring actions to be undertaken by the Ecologist (if any). - The statement must also state the name of the contractor's appointed on-site biodiversity champion, and their role (including appropriate authority).
2	No net loss	1	1	0	No net loss (1 credit) Targeted – Yes The criteria for Implementation of measures on-site credit have been achieved as above. There is no net loss of ecological value on site caused by construction and handover activities. This must be confirmed at project handover by the ecologist. <u>Comments & Actions</u> The Ecologist must confirm via report or statement that there will be no net loss of ecological value on site.
Lue 04 - Ecological change and enhancement					
Pre-req	Prerequisite Managing negative impacts on ecology	✓	✓		Prerequisite Managing negative impacts on ecology Achieve Implementation of measures on-site credit in Lue 03.
1	Ecological enhancement	1	1	0	Ecological enhancement (1 credit) Targeted – Yes Foundation route Locally relevant ecological measures have been implemented that enhance the site's ecological value. The measures adopted are based on:

Credit	Available	Targeted	Potential	Comments
				a. Recommendations from recognised 'local' ecological expertise and specialist input and guidance b. Input from the project team in collaboration with representative stakeholders and data collated as part of 'Determining ecological outcomes' in Lue 02. Comprehensive route Measures have been implemented that enhance ecological value, which are based on input from the project team and SQE in collaboration with representative stakeholders and data collated as part of 'Determining ecological outcomes' in Lue 02. Measures are implemented in the following order: a. On-site, and where this is not feasible b. Outside of the site boundary, within the zone of influence Data collated are analysed and where potentially valuable, provided to the local environmental records centres nearest to, or relevant for, the site. Comments & Actions - Ecologist to provide recommendations for ecological enhancement within the report. - Drawings and specifications demonstrating that the recommendations have been implemented in the design.
2	Quantifying change in ecological value	3	1	Quantifying change in ecological value (3 credits) Targeted – Yes Comprehensive route Site baseline > 0.1 BU Up to three credits are available based on the scale in Table 11.4 below. The enhancement measures that contribute to the score for biodiversity net gain should be implemented in the following order: a. On-site within the boundary, and where this is not feasible, b. Enhancements within the zone of influence/wider development area, and where this is not feasible, c. Off-site units following the rules of the Statutory Biodiversity Metric, subject to the following: i. The SQE confirms that better outcomes for nature can be achieved off-site and/or off-site enhancement would be more effective than

Credit	Available	Targeted	Potential	Comments																									
				what can be done solely in the development boundary/zone of influence. ii. There has been no net loss of biodiversity on-site. iii. There are arrangements in place for the on-going maintenance of the enhanced land to ensure the habitat is safeguarded over a 30-year period. Table 11.4: Credits awarded based on output from the Statutory Biodiversity Metric tool <table><tr><th>Total project biodiversity change</th><th>Credits</th></tr><tr><td>≥ 10%</td><td>1</td></tr><tr><td>≥ 20%</td><td>2</td></tr><tr><td>≥ 30%</td><td>3</td></tr><tr><td>≥ 40%</td><td>3 + 1 exemplary</td></tr></table> OR Comprehensive route Site baseline ≤ 0.1 BU Up to three credits are available based on biodiversity units (BUs) per site area (ha) or per 10 m of hedgerow post development as shown in Table 11.5 below. This is only based on the hedgerow-based metric and area-based metric. Table 11.5: Credits awarded based on biodiversity units (BUs) per site area (ha) and per length of hedgerow <table><tr><th>Biodiversity units per site area (BU/ha)</th><th>Biodiversity units per 10m length of hedgerow (BU/10m length)</th><th>Credits</th></tr><tr><td>≥ 1.50</td><td>≥ 0.01</td><td>1</td></tr><tr><td>≥ 2.00</td><td>≥ 0.03</td><td>2</td></tr><tr><td>≥ 2.50</td><td>≥ 0.04</td><td>3</td></tr><tr><td>≥3.00</td><td>≥ 0.05</td><td>3 + 1 exemplary</td></tr></table> Comments & Actions Ecologist to provided completed version of the Statutory Biodiversity Metric tool in order to award the credits.	Total project biodiversity change	Credits	≥ 10%	1	≥ 20%	2	≥ 30%	3	≥ 40%	3 + 1 exemplary	Biodiversity units per site area (BU/ha)	Biodiversity units per 10m length of hedgerow (BU/10m length)	Credits	≥ 1.50	≥ 0.01	1	≥ 2.00	≥ 0.03	2	≥ 2.50	≥ 0.04	3	≥3.00	≥ 0.05	3 + 1 exemplary
Total project biodiversity change	Credits																												
≥ 10%	1																												
≥ 20%	2																												
≥ 30%	3																												
≥ 40%	3 + 1 exemplary																												
Biodiversity units per site area (BU/ha)	Biodiversity units per 10m length of hedgerow (BU/10m length)	Credits																											
≥ 1.50	≥ 0.01	1																											
≥ 2.00	≥ 0.03	2																											
≥ 2.50	≥ 0.04	3																											
≥3.00	≥ 0.05	3 + 1 exemplary																											

Credit		Available	Targeted	Potential	Comments
e1	Quantifying change in ecological value - Exemplary credit	1	0	0	<u>Comments & Actions</u> <i>This credit is not sought due to high benchmarks.</i>
Lue 05 - Long term ecological management					
Pre-req	Prerequisite Ecological change and enhancement	✓	✓		Prerequisite Ecological change and enhancement Achieve at least one credit in Lue 04.
1	Handover to building owner or tenant	1	1	0	Handover to building owner or tenant (1 credit) Targeted – Yes A section on ecology and biodiversity has been included as part of the information supplied to the tenant or building owner. This information must be in a separate document from the landscape and ecology management plan and: a. Inform the building owner or tenant about local ecological features and biodiversity associated with the site including an 'as-built' biodiversity metric calculation (where relevant). b. Include detailed management and maintenance plans and relevant handover information to minimise loss of planting during establishment phase. <u>Comments & Actions</u> <i>Client/developer to confirm ecological and biodiversity handover information will be provided.</i> <i>Project Team to provide copy of ecological and biodiversity handover information.</i>
2	Landscape and ecology management plan	1	1	0	Landscape and ecology management plan (1 credit) Targeted – Yes A landscape and ecology management plan, or equivalent, has been developed in accordance with BS 42020:2013 Section 11.1. This will cover detailed plans for an initial 5-year establishment period and maintenance of the scheme, as well as an additional 25-year management strategy. The whole plan should cover a period of 30 years in total. It should cover the broader management of habitats and other ecological features on site, not just those specific to the BNG measures. The plan includes: a. Actions and responsibilities of relevant individuals before handover.

Credit		Available	Targeted	Potential	Comments
					b. The ecological value and condition of the site at handover and how this is expected to develop and change over time. c. Procedures to monitor and review the on-going implementation and effectiveness of measures, incorporating an adaptive management approach. d. Risk register, including trigger for action and remedial measures with consideration on how these feed into monitoring requirements. e. Maintenance and management plans for the retained, enhanced and created habitats, as well as any features for protected species. This should include a detailed work schedule outlining relevant maintenance on a monthly basis for the first five years after completion. f. Identifying opportunities for ongoing alignment with activities external to the asset. g. Clearly defined responsibilities and competencies of those delivering the plan. <u>Comments & Actions</u> <i>Project Team to provide a draft copy of the Landscape and Ecological Management plan.</i>
		13	9	0	Standard Land Use & Ecology Credit Total
		2	0	0	Exemplary Land Use & Ecology Credit Total
		12.53	7.29	0	% Land Use & Ecology Total (Standard + Exemplary)
Pollution (0.62 % per Credit)					
Pol 01 - Impact of refrigerants					
1	Impact of refrigerants	3	2	0	Impact of refrigerants (2 credits) Targeted – Yes Specific note – credits may only be awarded where clauses are included in a green lease agreement that ensure that the relevant criteria will be met. Up to two credits can be achieved where the building does not require the use of refrigerants within its installed plant or systems. <i>Buildings with systems that use refrigerants (Assumed)</i>

Credit	Available	Targeted	Potential	Comments
				Prerequisite: All systems with electric compressors must comply with relevant safety standards for installing refrigerant systems. Safety standards for installation of refrigeration systems: - EN 378-3:2016+A1:2020 – Refrigerating systems and heat pumps. Safety and environmental requirements – Installation site and personal protection - ISO 5149:2014 – Refrigeration systems and heat pumps - ASHRAE 15-2016 – Safety Standard for Refrigeration Systems - Safety Code of Practice for Ammonia Refrigerant R717 – Institute of Refrigeration - GBT9237-2017 Standard for Safety and Environmental Requirements for Refrigeration Systems and Heat Pumps The refrigerants used must have an ozone depletion potential of zero. <i>Impact of refrigerant</i> One credit: Systems using refrigerants must have an average direct effect life cycle (DELCC) carbon dioxide equivalent (CO₂e) emission rate of < 1000 kgCO₂e per kW of cooling or heating capacity (Targeted). Two credits: Systems using refrigerants must either: a. Have an average direct effect life cycle (DELCC) carbon dioxide equivalent (CO₂e) emission rate of < 100 kgCO₂e per kW cooling or heating capacity. OR b. Use a refrigerant with a global warming potential (GWP) of < 10 kgCO₂e/kg. <i>Leak detection – not targeted</i> Systems using refrigerants are either: a. Hermetically sealed, OR; b. The refrigerant charge volume is < 500 tonnes of carbon dioxide equivalent (CO₂e), OR; c. Use environmentally benign refrigerants. OR

Credit	Available	Targeted	Potential	Comments
				There must either be: a. A permanent automated refrigerant leak detection system that is capable of continuously monitoring for leaks, OR; b. An inbuilt automated diagnostic procedure for detecting leakage capable of continuously monitoring for leaks. The leak detection system must facilitate the isolation and containment of the remaining refrigerant charge in response to a leak detection incident. <u>Comments & Actions</u> • MEP confirmed that 2 credits is assumed at this stage. • MEP to provide letter of confirmation declaring systems using refrigerants will have an average direct effect life cycle (DELCO) carbon dioxide equivalent (CO₂e) emission rate of < 1000 kgCO₂e per kW of cooling or heating capacity. • All relevant datasheets for refrigerant type, and systems using refrigerants. <i>Examples:</i> <i>Ensure that the chosen refrigerant has a GWP of < 10 kgCO₂e/kg. (e.g. R433B, R441A, R432A, R443A).</i> <i>Hermetically sealed refrigerants or, consider using environmentally benign refrigerants (e.g. air, water, carbon dioxide, butane, lithium bromide, solid refrigerants)</i>
Pol 02 - Local air quality				
1	No or low emission combustion plant	3	3	No or low emission combustion plant (3 credits) Targeted – Yes Three credits – No installed combustion plant: Non-combustion systems supply all space heating and domestic hot water generation on-site (Assumed). Up to two credits – Low-emission combustion plant: Emissions from all installed combustion plant that provide space heating or domestic hot water do not exceed the levels set below:

Credit	Available	Targeted	Potential	Comments												
				Table 12.2: Credits awarded based on NO_x emission levels (mg/kWh) by population density <table><tr><th colspan="4">Maximum mg NO_x/kWh fuel input in terms of gross calorific value (GCV)</th></tr><tr><td>1 credit (low population locations)</td><td>1 credit (high population locations)</td><td>2 credits (low population locations)</td><td>2 credits (high population locations)</td></tr><tr><td>56</td><td>27</td><td>27</td><td>24</td></tr></table> Comments & Actions - It is assumed that all electric plant equipment will be installed. - MEP design drawings to be provided showing all heat-generating equipment for space heating and domestic hot water in the building.	Maximum mg NO _x /kWh fuel input in terms of gross calorific value (GCV)				1 credit (low population locations)	1 credit (high population locations)	2 credits (low population locations)	2 credits (high population locations)	56	27	27	24
Maximum mg NO _x /kWh fuel input in terms of gross calorific value (GCV)																
1 credit (low population locations)	1 credit (high population locations)	2 credits (low population locations)	2 credits (high population locations)													
56	27	27	24													
Pol 03 - Flood and surface water management																
Pre-req	Prerequisite Appropriate consultant	✓	✓	Prerequisite Appropriate consultant An appropriate consultant is appointed to carry out and demonstrate the development's compliance with the all the criteria for this issue.												
1	Flood resilience	2	1	0	Flood resilience (2 credits) Targeted – Yes (1 credit) Two credits Low flood risk (Not Targeted) A site-specific flood risk assessment (FRA) confirms the development is in a flood zone that is defined as having a low annual probability of flooding. The FRA takes all current and future sources of flooding into consideration. One credit Medium or high flood risk (Targeted) A site-specific FRA, developed by an appropriate consultant, confirms the development is in a flood zone that is defined as having a medium or high annual probability of flooding and is not in a functional floodplain. The FRA must take all current and future sources of flooding into consideration. As the site is <2000m² an acceptable FRA could be a brief report carried out by the contractor's engineer confirming the risk of flooding. This must include the risk from all sources of flooding, and information obtained from the Environment Agency, water company or sewerage undertaker, other relevant statutory authorities, site investigation and local knowledge.											

Credit	Available	Targeted	Potential	Comments	
				To increase the resilience and resistance of the development to flooding, one of the following must be achieved: a. The ground level of the building and access to both the building and the site, are designed (or zoned) so they are at least 600 mm above the design flood level of the site's flood zone. b. The final design of the building and the wider site reflects the recommendations made by an appropriate consultant in accordance with the hierarchy approach outlined in section 5 of BS 8533:2017. <u>Comments & Actions</u> • <i>Desk based study carried out and it is assumed that the site exists in a low flood risk zone.</i> • <i>Project Team and Drainage consultant to provide a copy of a compliant Flood Risk Assessment.</i>	
2	Surface water run-off	2	2	0	Surface water run-off (2 credits) Targeted – Yes Pre-requisite for surface water run-off credits Surface water run-off design solutions must be bespoke, i.e. they must take account of the specific site requirements and natural or man-made environment of and surrounding the site. The priority levels detailed below must be followed, with justification given by the appropriate consultant where water is allowed to leave the site. Priority levels: - Priority Level 1: Water is collected for use in the development (e.g. rainwater reuse) - Priority Level 2: Water is infiltrated into the ground - Priority Level 3: Water is discharged to surface water body - Priority Level 4: Water is discharged to the drainage system - Priority Level 5: Water is discharged to a combined sewer One credit Surface water run-off Rate For brownfield sites, drainage measures are specified so that the peak rate of run-off from the site to the watercourses (natural or municipal) shows a 30% improvement for

Credit	Available	Targeted	Potential	Comments
				the developed site compared with the pre-developed site. This should comply at the 1-year and 100-year return period event AND For greenfield sites, drainage measures are specified so that the peak rate of run-off from the site to the watercourses (natural or municipal) is no greater for the developed site than it was for the pre-development site. This should comply at the 1-year and 100-year return period events AND Relevant maintenance agreements for the ownership, long term operation and maintenance of all specified Sustainable Drainage Systems (SuDS) are in place AND Calculations include an allowance for climate change. This should be made in accordance with current best practice planning guidance. One credit Surface water run-off Volume Flooding of assessed buildings will not occur in the event of local drainage system failure (caused either by extreme rainfall or a lack of maintenance); AND EITHER a. Specify drainage design measures that ensure post-development surface water run-off volume is no greater than the pre- development run-off volume. Show this with calculations for a 100-year 6-hour event adjusted for climate change, timing the event at the end of the developments expected life AND any additional predicted volume of run-off for this event is prevented from leaving the site by using infiltration or other SuDS techniques. OR (only where the above (a.) cannot be achieved): b. Justification from the appropriate consultant indicating why the above criteria cannot be achieved, i.e. where infiltration or other SuDS techniques are not technically viable options. Drainage design measures are specified so that the post-development peak rate of run-off is reduced to the limiting discharge. The limiting discharge is defined as the highest flow rate from the following options: i. The pre-development one-year peak flow rate ii. The mean annual flow rate (Qbar)

Credit	Available	Targeted	Potential	Comments	
				iii. 2 L/s/ha. For the one-year peak flow rate, the one-year return period event criterion applies. Relevant maintenance agreements for the ownership, long term operation and maintenance of all specified SuDS are in place. For either option, above calculations must include an allowance for climate change; this should be made in accordance with current best practice planning guidance. <u>Comments & Actions</u> • <i>Surface water drainage report and calculations required to show the pre-development, greenfield and post-development peak rate of run-off and volume run-off.</i> • <i>Design drawings required to show the drainage design.</i> <i>Examples:</i> <i>SuDS management to reduce run-off rate and volume:</i> - <i>Source control: Porous paving; Rainwater harvesting; Green roofs etc.</i> - <i>Site or local control: Infiltration basins; Swales; Detention basins etc.</i>	
3	Minimising watercourse pollution	1	1	0	Minimising watercourse pollution (1 credit) Targeted – Yes There is no discharge from the developed site for rainfall up to 5 mm (confirmed by the appropriate consultant). Areas with a low risk source of watercourse pollution, have an appropriate level of pollution prevention treatment provided using appropriate SuDS techniques. Areas with a high risk of contamination or spillage of substances, such as petrol and oil, have separators (or an equivalent system) installed in surface water drainage systems. Chemical or liquid gas storage areas have a means of containment fitted to the site drainage system (i.e. shut-off valves). This is to prevent the escape of chemicals to natural watercourses in the event of a spillage or bunding failure.

Credit		Available	Targeted	Potential	Comments
					All water pollution prevention systems have been designed and installed in accordance with the recommendations of documents such as the SuDS manual and other relevant industry best practice. They must be bespoke solutions taking account of the specific site requirements and natural or man-made environment of and surrounding the site. A comprehensive and up to date drainage plan of the site will be made available for the building or site occupiers. Relevant maintenance agreements for the ownership, long term operation and maintenance of all specified SuDS must be in place. All external storage and delivery areas are designed and detailed in accordance with the current best practice planning guidance. <u>Comments & Actions</u> • <i>Project Team/Structural Engineer confirmed credit is achievable.</i> • <i>Drainage report to include calculations confirming there will be no discharge from the site for rainfall up to 5mm.</i> • <i>Design drawings showing the drainage strategy:</i> - <i>High/low risk areas on site</i> - <i>Specification of SuDS, source control systems, oil or petrol separators and shut-off valves as appropriate.</i> - <i>Water pollution prevention systems.</i> - <i>External storage and delivery areas.</i> <i>Letter of confirmation from the appropriate consultant to declare agreements for ownership, long-term operation and maintenance of all specified SuDS must be in place.</i>
Pol 04 - Reduction of nighttime light pollution					
1	Reduction of light pollution	1	1	0	Reduction of light pollution (1 credit) Targeted – Yes Light pollution has been eliminated through effective design that removes the need for artificial lighting at night. This does not adversely affect the safety and security of the site and its users.

Credit	Available	Targeted	Potential	Comments
				OR Where the building does use artificial lighting at night the lighting strategy has been designed to reduce obtrusive light. This includes both external lighting and internal lighting in spaces with glazed apertures AND; All external lighting (except for safety and security) is automatically switched off between 23:00 and 07:00 AND; Illuminated advertisements are designed to control brightness and minimise visual disturbance during nighttime hours AND; Lighting is designed to minimise impacts on nocturnal wildlife. The lighting strategy design should follow the five sets of recommendations outlined in the Institution of Lighting Professionals (ILP) Guidance Note 01/21 – The reduction of obtrusive light (GN01/21): 1. Limitation of illumination on surrounding premises 2. Limitation of bright luminaires in the field of view 3. Limitation of the effects on transport systems 4. Limitation of skyglow 5. Limitations of the effect of over-lit building facades and signs Comments & Actions • <i>Project Team/MEP to confirm that the external lighting to be installed will comply with the standards.</i> • <i>Design drawings and lighting specifications must be provided, where available.</i> <i>Examples:</i> <i>Limit vertical illuminance where possible and make use of down lighters/cut-off type and angled luminaires.</i>
Pol 05 - Reduction of noise pollution				
1	Noise level	1	1	0
				Noise level (1 credit) Targeted – Yes

Credit	Available	Targeted	Potential	Comments
				There are no noise-sensitive areas within the assessed building or within 800m radius of the assessed site OR Where there are noise-sensitive areas within the assessed building or noise-sensitive areas within 800m radius of the assessed site, a noise impact assessment compliant with BS 4142:2014(145) is commissioned. Noise levels must be measured or determined for: a. Existing background noise levels: i. At the nearest or most exposed noise-sensitive development to the proposed assessed site. ii. Including existing plant on a building, where the assessed development is an extension to the building. b. New noise level from the assessed building The noise impact assessment must be carried out by a suitably qualified acoustic consultant. The noise level from the assessed building, as measured in the locality of the nearest or most exposed noise-sensitive development, must be at least 5 dB lower than the background noise throughout the day and night. If the noise sources from the assessed building are greater than the levels described above, measures have been installed to attenuate the noise at its source to a level where it will comply with the noise level limits. <u>Comments & Actions</u> • <i>Project Team to appoint suitably qualified acoustician to produce a compliant external noise impact assessment.</i> • <i>Client/developer commits to completing a post-construction testing.</i> • <i>Relevant design drawings confirming any attenuation measures or recommendations from the acoustician.</i> <i>Examples:</i>

Credit		Available	Targeted	Potential	Comments
					<i>Install noise attenuators / sound screening around any external plant equipment if relevant.</i>
		13	11	0	Standard Pollution Credit Total
		0	0	0	Exemplary Pollution Credit Total
		8.06	6.82	0	% Pollution Total (Standard + Exemplary)
Innovation (1 % per Credit)					
Inn 01 - Innovation					
1	Approved innovations	1	0	0	Approved innovations (1 credit) Targeted – No One innovation credit can be awarded for each innovation application approved by BRE Global, where the building complies with the criteria defined within an approved innovation application form.
		0	0	0	Standard Innovation Credit Total
		1	0	0	Exemplary Innovation Credit Total
		1	0	0	% Innovation Total (Standard + Exemplary)
			79	31	OVERALL TOTALS
			62.93	20.47	% OVERALL TOTALS



sre

3 London Square
Cross Lanes
Guildford
GU1 1UJ

T. +44 (0)1730 710044

E. info@sre.co.uk

W. sre.co.uk