




MCC-P-Utilities and Process MCC										
Cable ID	Working Voltage	From	Way	To	Conductor Make-up	Conductor Type	Length (m)	Method	Protective Device	Voltage Drop
	400V AC	Supply	N/A	MCC-P					ACB 3P 1250A Ir=1250A/65kA	0 %
c-f-2	400V AC	MCC-P	1.1.1.2.L3	6/07 - LYO-01	4Cx35mm ² + 1x16mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a perforated cable tray	Fuse 3P 100A/80kA	2.49 %
c-f-3	400V AC	MCC-P	2.1.1.2.L3	6/08 - HPLC	4Cx10mm ² + 1x4mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a ladder flat touching	Fuse 3P 40A/80kA	2.77 %
c-f-4	400V AC	MCC-P	3.1.1.2.L3	7/01 - W-PMP	3Cx2.5mm ² + 1x1.5mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a ladder flat touching	Fuse 3P 25A/80kA	2.34 %
c-f-4	400V AC	MCC-P	4.1.1.2.L3	8/01 - W-PMP02	3Cx2.5mm ² + 1x1.5mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a ladder flat touching	Fuse 3P 25A/80kA	2.34 %
c-f-5	400V AC	MCC-P	5.1.1.2.L3	10/01 - T-PMP	3Cx2.5mm ² + 1x1.5mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a ladder flat touching	Fuse 3P 25A/80kA	2.34 %
c-f-6	400V AC	MCC-P	6.1.1.2.L3	11/01 - CIP-PMP	3Cx2.5mm ² + 1x1.5mm ² E (Run to 70 °C)	SWA/XLPE90(70)/Cu,LSZH	100	Ref. E - On a ladder flat touching	Fuse 3P 25A/80kA	2.34 %

[illegible]

RB HOUSE, THE SQUARE,
LENHAM, KENT, ME17 2PG, UK

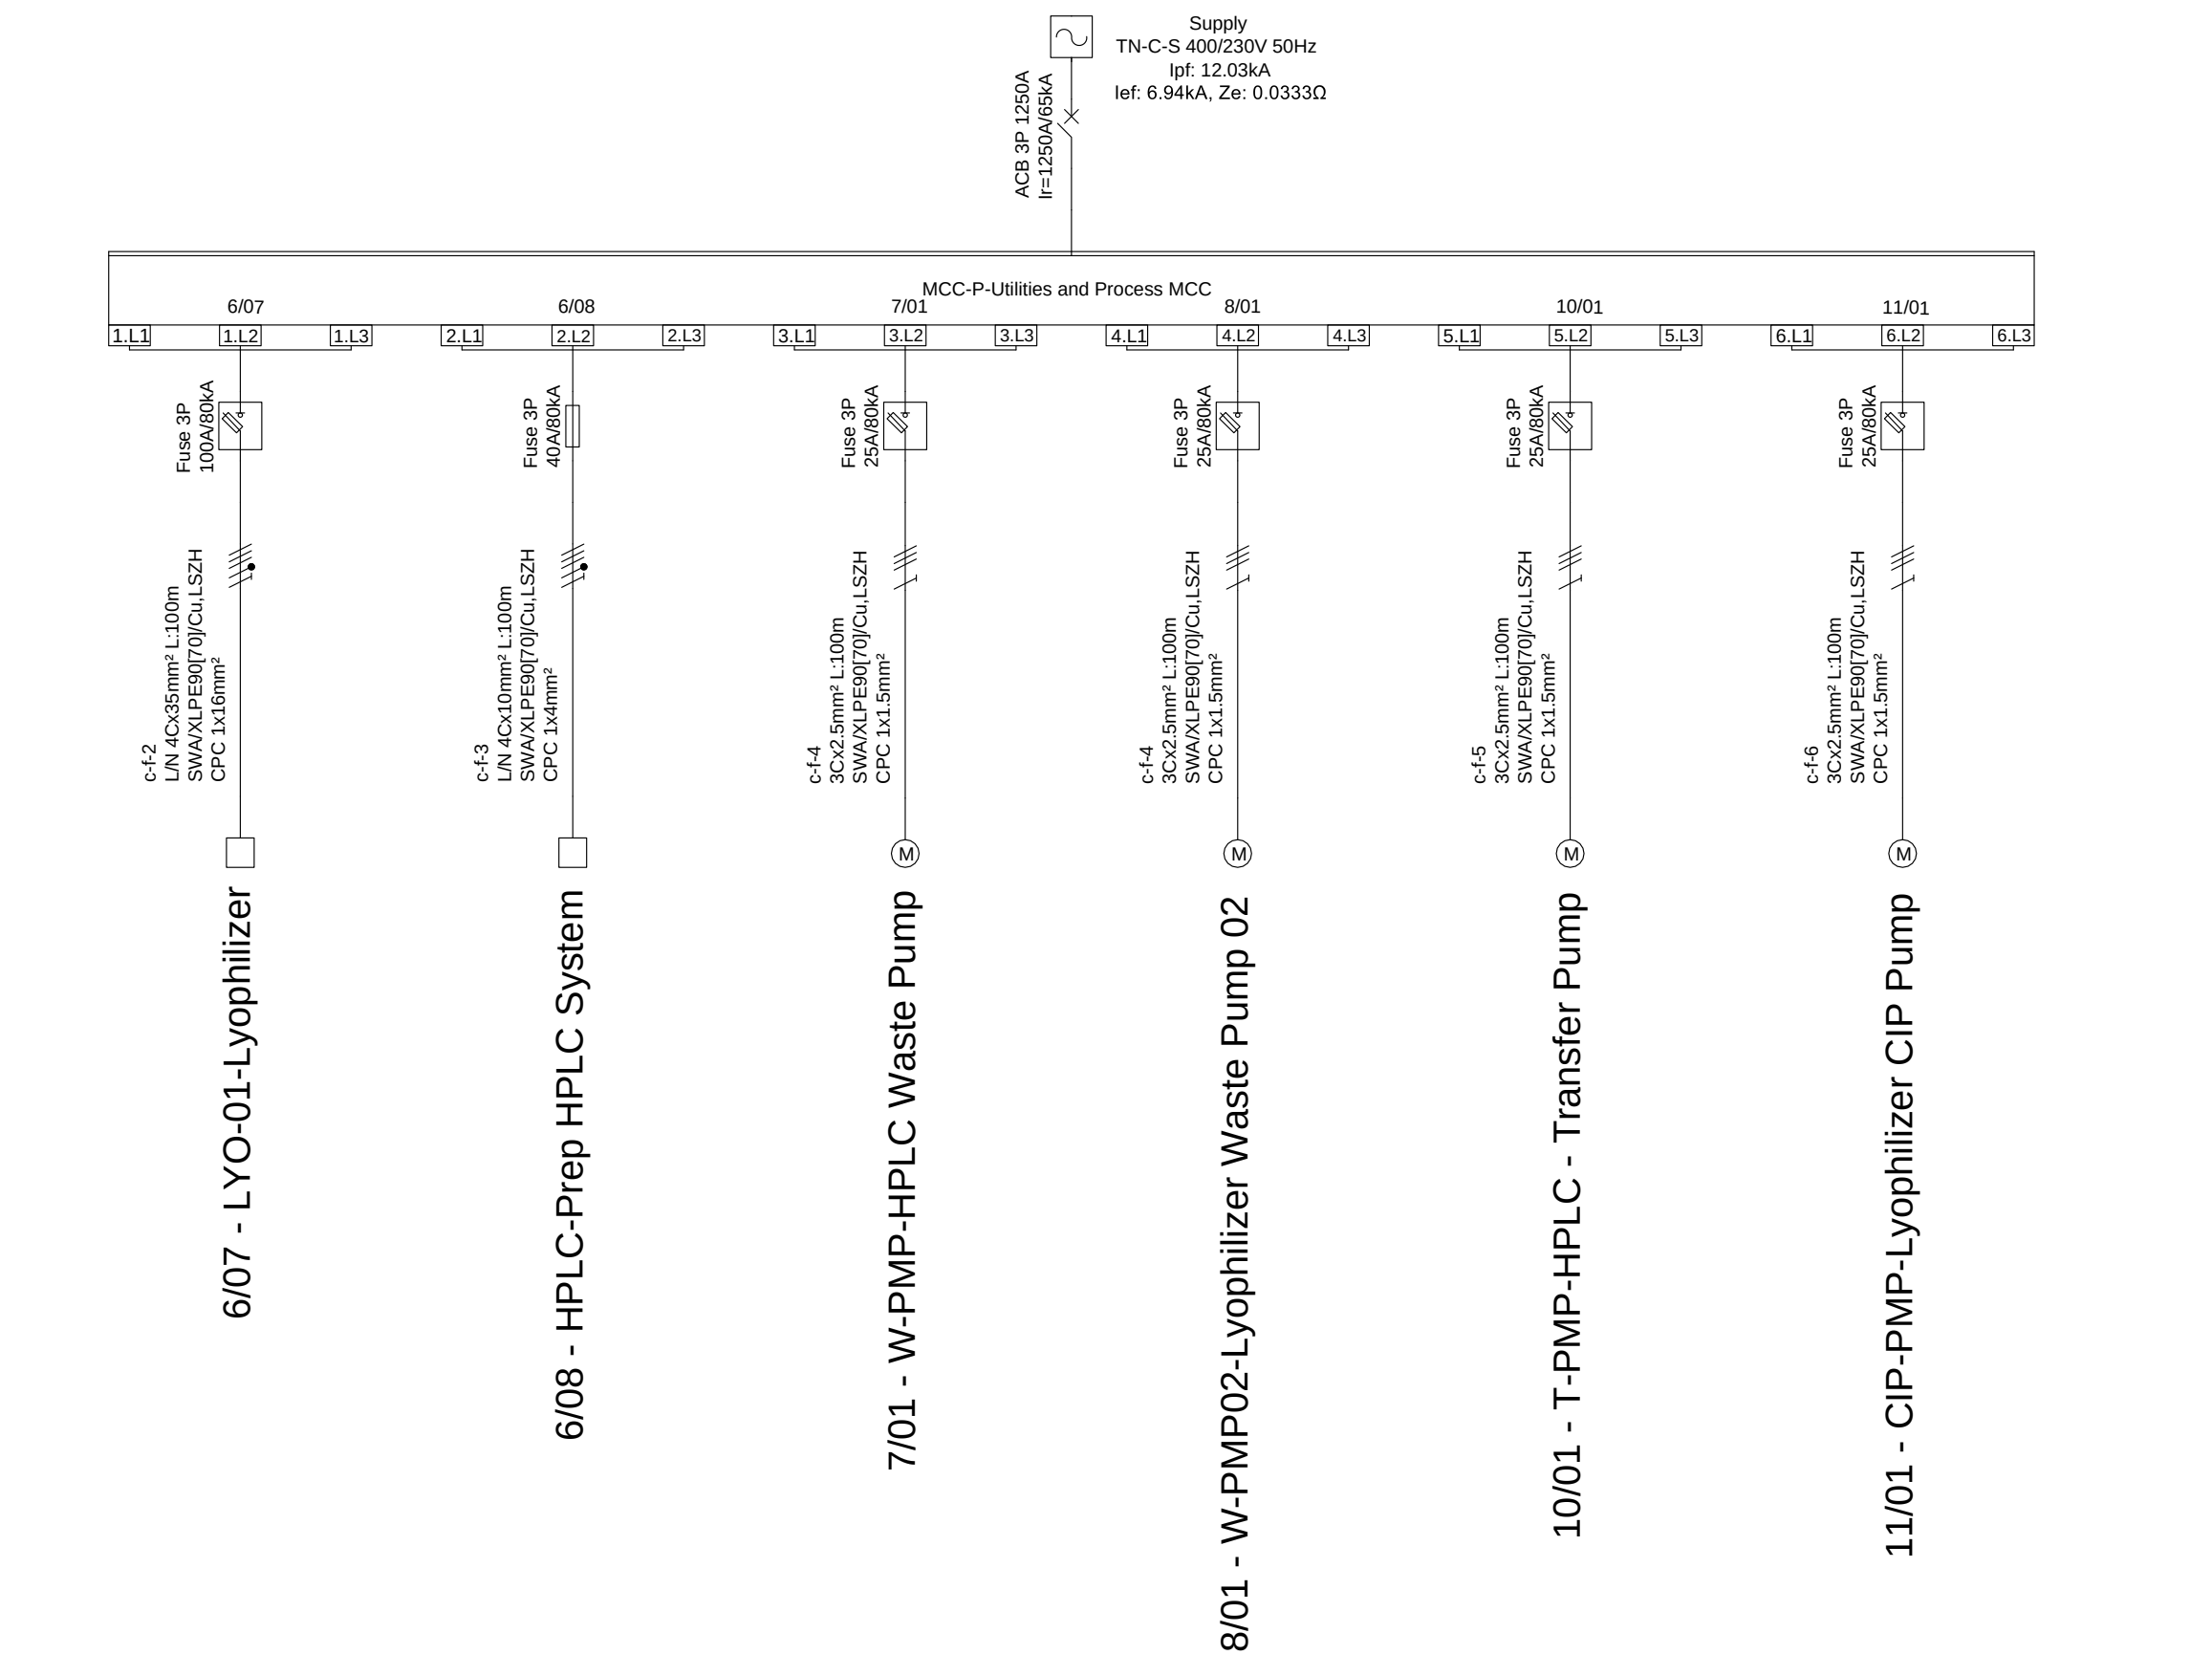

CLIENT	
Asymchem	
PROJECT NO.	PROJECT TITLE
PC9802 -	Modifications to Existing Footprint
DRAWING TITLE	
MCC-P New Additions Single Line Diagram	

DRAWING NO:				19802-RBP-ZZ-ZZ-DR-E-500000				A	
DOCUMENT TYPE:				Concept stage					
DRAWN		Robert Day		DATE		15/05/2026		STATUS	
CHG				DATE				Preliminary	
APP'D				DATE				P01	
SCALE		NTS							